


Spiralsolution 43000 FSL




Württembergische
Spiralsiebfabrik GmbH

Data sheet (heat set fabric)

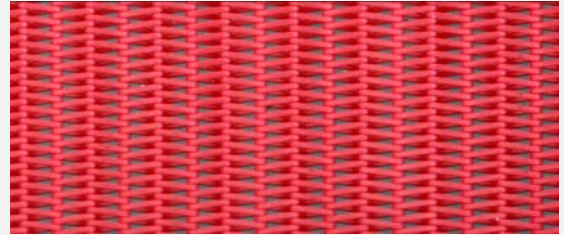

Technical Data

Air Permeability:	(cfm)	950
Grammage:	(g/m ²)	795
Thickness:	(mm)	1,85
Spacing:	(m-1)	187
Ø Monofilament Spiral:	PET	0,43 x 0,70
Ø Monofilament Pintle:	PET	0,70
Size of filler:	xxx	xxx

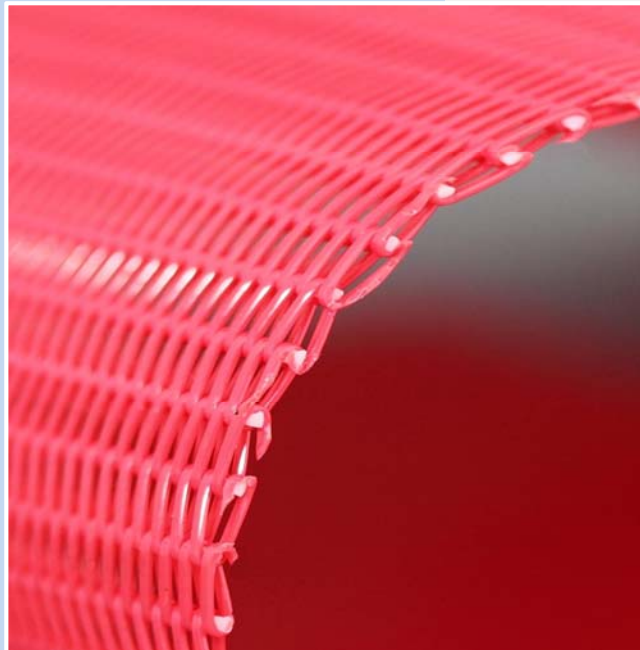

Characteristics & Application:

Hydrolysis stabilized

Optimized contact area and high drying capacity

Low thickness

Dryer fabric LWC, SC, News paper

Board with sensitive surface for markings


High speed positions PMC

Spiralsolution 43000 FSL




Württembergische
Spiralsiebfabrik GmbH

Data sheet (heat set fabric)

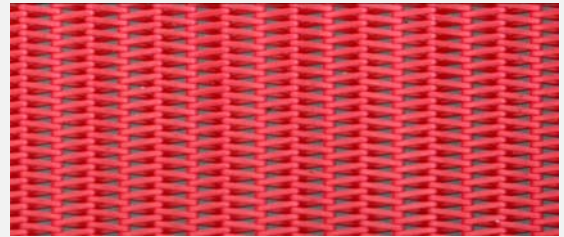

43000 FSL, 43000 FHL, 43000 FTL, 43000 FLL

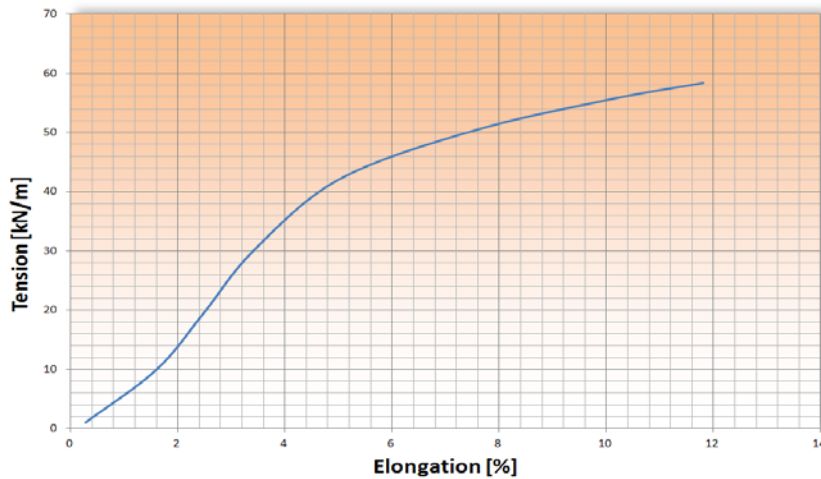

Contact Area



36%

Elongation at specific tension
43000 FSL, 43000 FHL, 43000 FTL, 43000 FLL

