

Spiralsolution 43250 FSL

Data sheet (heat set fabric)




Württembergische
Spiralsiebfabrik GmbH



Technical Data

Air Permeability:	(cfm)	250
Grammage:	(g/m ²)	1295
Thickness:	(mm)	1,85
Spacing:	(m-1)	187
Ø Monofilament Spiral:	PET	0,43 x 0,70
Ø Monofilament Pintle:	PET	0,70
Size of filler:	PET / P40.1	3,35 x 0,83

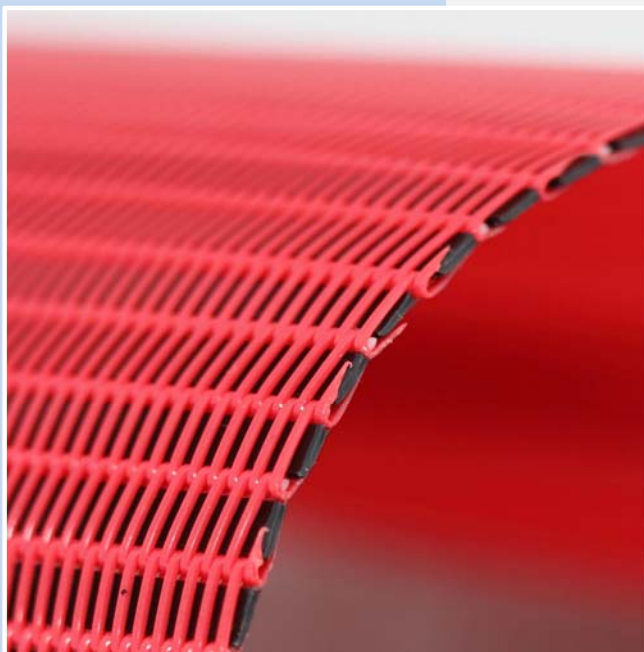

Characteristics & Application:

Optimized contact area and high drying capacity

Low thickness

Hydrolysis stabilized

Dryer fabric LWC, SC, News paper

High speed positions PMC


Board with sensitive surface for markings

Spiralsolution 43250 FSL


Data sheet (heat set fabric)



Württembergische
Spiralsiebfabrik GmbH

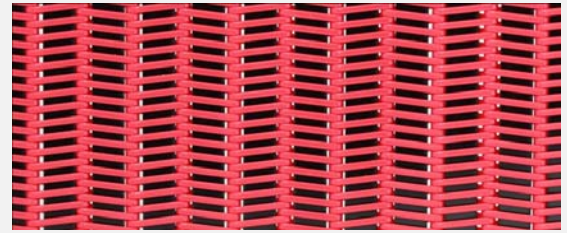

43000 FSL, 43000 FHL, 43000 FTL, 43000 FLL

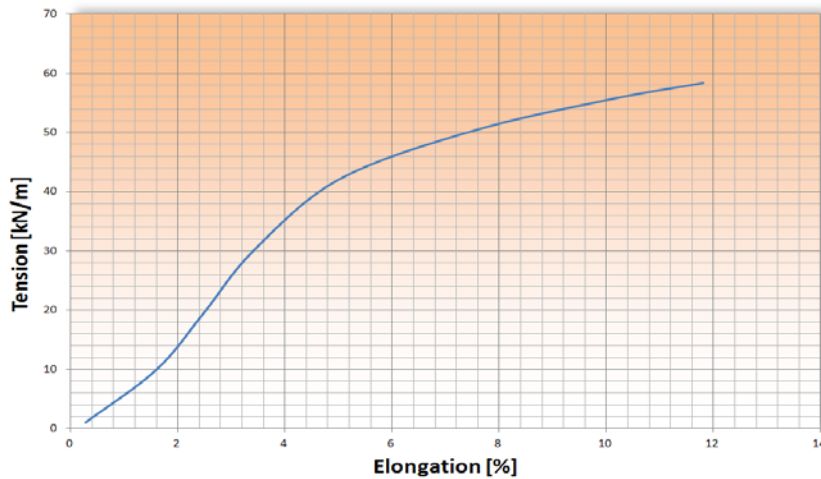

Contact Area



36%

Elongation at specific tension
43000 FSL, 43000 FHL, 43000 FTL, 43000 FLL

