


Spiralsolution 60250 SL




Württembergische
Spiralsiebfabrik GmbH

Data sheet (heat set fabric)

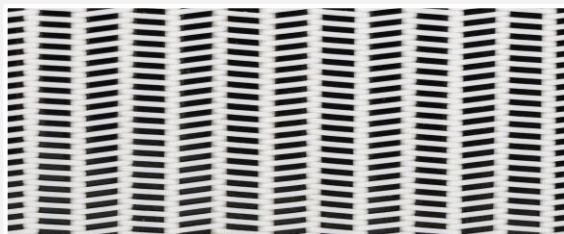

Technical Data

Air Permeability:	(cfm)	250
Grammage:	(g/m ²)	1425
Thickness:	(mm)	2,10
Spacing:	(m-1)	192
Ø Monofilament Spiral:	PET	0,60
Ø Monofilament Pintle:	PET	0,70
Size of filler:	PET / P40.1	2,90 x 0,74

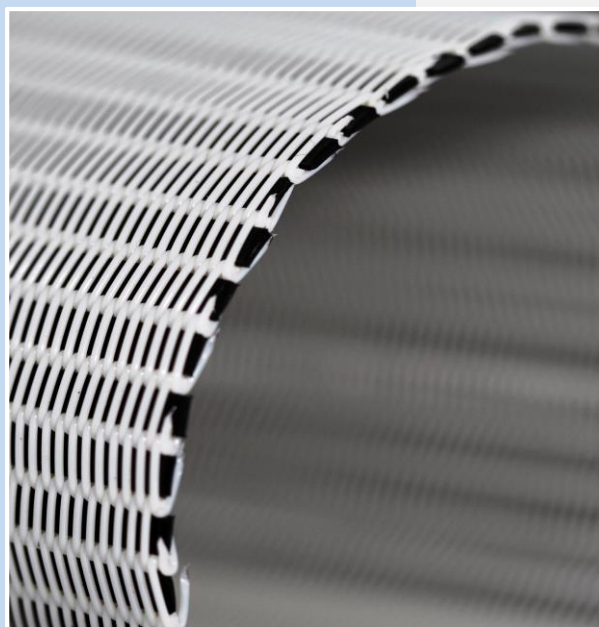

Characteristics & Application:

High drying capacity

High hydrolytic stability on request

Easy seam closing

Board

Packaging paper


Slurry dewatering

Spiralsolution 60250 SL




Württembergische
Spiralsiebfabrik GmbH


Data sheet (heat set fabric)

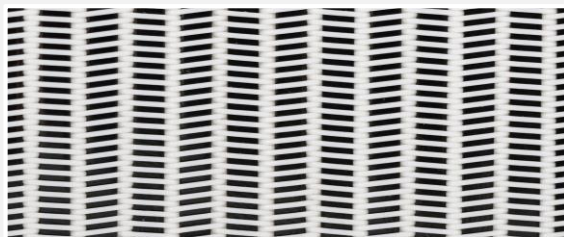

60000 SL, 60000 HL, 60000 TL, 60000 TL+, 60000 LL, 60000 QL

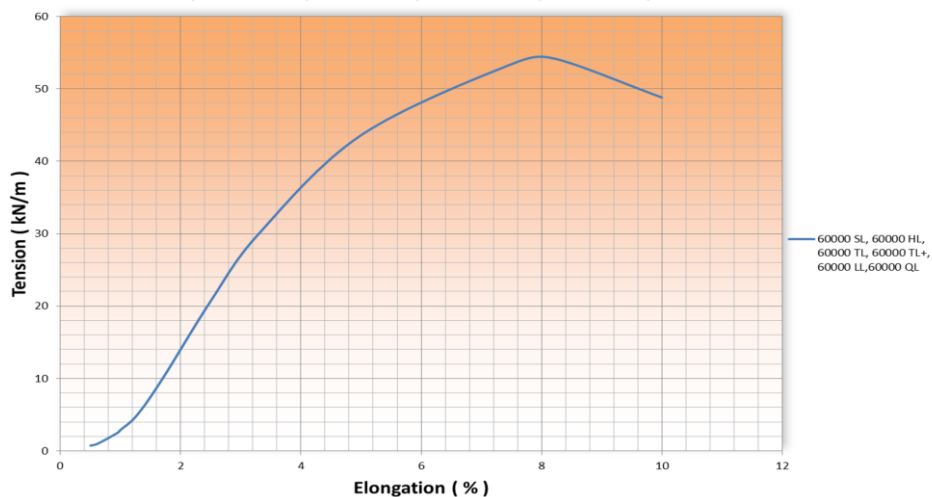

Contact Area



22%

Elongation at specific tension
60000 SL, 60000 HL, 60000 TL, 60000 TL+, 60000 LL, 60000 QL

