

Espacenet Meine Patentliste am 22-08-2016 15:05

4 Dokumente in "Meine Patentliste"
Anzeige ausgewählte Publikationen

Veröffentlichung	Titel	Seite
WO2004061168 (A2)	SHAPED MONOFILAMENTS WITH GROOVES AND...	2

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
22 July 2004 (22.07.2004)

PCT

(10) International Publication Number
WO 2004/061168 A2

- (51) International Patent Classification⁷: **D01D**
- (21) International Application Number:
PCT/US2003/040529
- (22) International Filing Date:
19 December 2003 (19.12.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
10/334,513 31 December 2002 (31.12.2002) US
- (71) Applicant (for all designated States except US): **ALBANY INTERNATIONAL CORP.** [US/US]; 1373 Broadway, Albany, NY 12204 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **LUO, Shuiyuan** [CN/US]; 685 East Seneca Turnpike, Syracuse, NY 13205 (US). **BILLINGS, Alan** [US/US]; 18 Kingswood Drive, Clifton Park, NY 12065 (US). **JOSEF, Michael** [US/US]; 5 Devonshire Way, Clifton Park, NY 12065 (US).
- (74) Agent: **SANTUCCI, Ronald, R.**; Frommer Lawrence & Haug LLP, 745 Fifth Avenue, New York, NY 10151 (US).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— without international search report and to be republished upon receipt of that report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SHAPED MONOFILAMENTS WITH GROOVES AND THE FABRICS MADE THEREOF

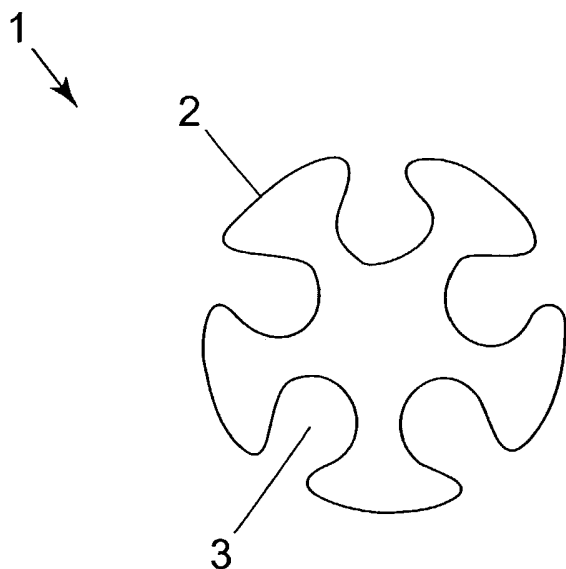

(57) Abstract: A monofilament with longitudinally oriented grooves and fabrics made thereof having reduced air permeability, wherein the reduced permeability is achieved without using additional coatings or stuffer yarns. Bicomponent monofilaments made from these grooved monofilaments using solution or wire coating have improved coating adhesion and may also include a conductive coating. In addition, the grooved bicomponent monofilaments may include a wear-indicating mechanism. Also disclosed are monofilaments with grooves formed in its surfaces. Advantageously, these grooved monofilaments exhibit improved adhesion to "sheet-grip" coatings, as compared with circular monofilaments. In addition, fabrics comprising these grooved monofilaments demonstrate improved air handling. The grooved monofilaments may be incorporated in a fabric as MD yarns, CD yarns, or both CD and MD yarns.

WO 2004/061168 A2

**SHAPED MONOFILAMENTS WITH GROOVES
AND THE FABRICS MADE THEREOF**

5

Background of the Invention

1. Field of the Invention

The present invention relates to shaped
10 yarns and industrial fabrics. More specifically, the
present invention relates to using yarns with
longitudinally oriented grooves to reduce fabric
permeability without the need of an additional
coating or stuffer yarns. These yarns can also be
15 bicomponent yarns with improved coating adhesion, or
bicomponent yarns with a wear-indicating mechanism.
The invention also relates to grooved yarns that
exhibit increased coating adhesion whilst providing
improved sheet and air handling in fabrics.

20

2. Description of the Prior Art

During the papermaking process, a
cellulosic fibrous web is formed by depositing a
fibrous slurry, that is, an aqueous dispersion of
25 cellulose fibers, onto a moving forming fabric in
the forming section of a paper machine. A large
amount of water is drained from the slurry through
the forming fabric, leaving the cellulosic fibrous
web on the surface of the forming fabric.

30

The newly formed cellulosic fibrous web
proceeds from the forming section to a press
section, which includes a series of press nips. The
cellulosic fibrous web passes through the press nips

supported by a press fabric, or, as is often the case, between two such press fabrics. In the press nips, the cellulosic fibrous web is subjected to compressive forces which squeeze water therefrom, and which adhere the cellulosic fibers in the web to one another to turn the cellulosic fibrous web into a paper sheet. The water is accepted by the press fabric or fabrics and, ideally, does not return to the paper sheet.

The paper sheet finally proceeds to a dryer section, which includes at least one series of rotatable dryer drums or cylinders, which are internally heated by steam. The newly formed paper sheet is directed in a serpentine path sequentially around each in the series of drums by a dryer fabric, which holds the paper sheet closely against the surfaces of the drums. The heated drums reduce the water content of the paper sheet to a desirable level through evaporation.

It should be appreciated that the forming, press and dryer fabrics all take the form of endless loops on the paper machine and function in the manner of conveyors. It should further be appreciated that paper manufacture is a continuous process which proceeds at considerable speeds. That is to say, the fibrous slurry is continuously deposited onto the forming fabric in the forming section, while a newly manufactured paper sheet is continuously wound onto rolls after it exits from the dryer section.

Contemporary papermaking fabrics are produced in a wide variety of styles designed to

meet the requirements of the paper machines on which they are installed for the paper grades being manufactured. Generally, they comprise a woven base fabric. The base fabrics may be woven from
5 monofilament, plied monofilament, multifilament or plied multifilament yarns, and may be single-layered, multi-layered or laminated. The yarns are typically extruded from any one of the synthetic polymeric resins, such as polyamide and
10 polyester resins, used for this purpose by those of ordinary skill in the paper machine clothing arts.

The woven base fabrics themselves take many different forms. For example, they may be woven endless, or flat woven and subsequently rendered
15 into endless form with a woven seam. Alternatively, they may be produced by a process commonly known as modified endless weaving, wherein the widthwise edges of the base fabric are provided with seaming loops using the machine-direction (MD) yarns
20 thereof. In this process, the MD yarns weave continuously back-and-forth between the widthwise edges of the fabric, at each edge turning back and forming a seaming loop. A base fabric produced in this fashion is placed into endless form during
25 installation on a paper machine, and for this reason is referred to as an on-machine-seamable fabric. To place such a fabric into endless form, the two widthwise edges are brought together, the seaming loops at the two edges are interdigitated with one
30 another, and a seaming pin or pintle is directed through the passage formed by the interdigitated seaming loops.

Further, the woven base fabrics may be laminated by placing at least one base fabric within the endless loop formed by another, and by needling a staple fiber batt through these base fabrics to
5 join them to one another. One or more of these woven base fabrics may be of the on-machine-seamable type. This is now a well known laminated press fabric with a multiple base support structure.

In any event, the woven base fabrics are
10 in the form of endless loops, or are seamable into such forms, having a specific length, measured longitudinally therearound, and a specific width, measured transversely thereacross.

Turning now to the yarns used heretofore,
15 particularly for dryer fabrics, monofilament yarns have typically been extruded with a simple circular cross-section. More recently, monofilaments with shaped cross-section have been produced. These shaped monofilaments have been used in woven fabrics
20 to modify the fabric surface texture or density, or in particular, to control the fabric air permeability. In this connection, for example, U.S. Patent 5,361,808 (Bowen) discloses using finned or T-shaped monofilaments as CD stuffer yarns to reduce
25 air permeability. As another example, U.S. Patent No. 5,998,310 (Bowen) shows a tri-lobal stuffer used to reduce permeability. "Y" and "X" and "T" shaped monofilaments are also described. Fabric stability at permeabilities of 200 CFM or greater using the
30 shaped cross-machine-direction (CD) yarns is maintained. None of the prior art however, uses shaped yarns as functional yarns which reduce air

permeability without using a coating and without using stuffer yarns. Nor does any of the prior art use shaped CD monofilaments for improved coating adhesion and for producing bicomponent monofilaments.

Also in connection with round MD yarns used heretofore in dryer fabrics, the fabric's sheet side has been treated with a coating that grips the paper sheet. Although the coating has sufficient abrasion resistance, there is concern that the coating will detach from the circular yarns prematurely. In addition, the fluoropolymer in the yarn and oils on its surface impeded attachment of the coating to the monofilaments. Adequate venting of moisture at the point of contact with the paper sheet, and sufficient air handling along the fabric surface have also been concerns.

Summary of the Invention

The present invention uses shaped functional yarns to reduce air permeability without the need to use a coating or stuffer yarns. The shaped monofilaments are also used for improved coating adhesion and for producing bicomponent monofilaments. More specifically, groove-shaped monofilaments are used as MD yarns, CD yarns, or both MD and CD yarns, and the fabrics made thereof are disclosed herein. When the fabrics are coated or laminated, the adhesion strength, tear-resistance and other properties are improved through an interlocking mechanism regardless of the particular coating chemistry. Also bicomponent monofilaments

may be made from these grooved monofilaments using solution or wire coating having improved delamination resistance and may also include a conductive coating. In addition, the bicomponent
5 monofilaments may include a wear-indicating mechanism.

The invention also provides monofilaments having circular or non-circular cross section and grooves formed therein. Advantageously, these
10 grooved monofilaments exhibit improved adhesion particularly to "sheet-grip" coatings. In addition, fabrics comprising these grooved monofilaments on the fabric's surface demonstrate improved air handling and reduced sheet marking. In connection
15 with this feature, the grooves in the monofilaments channel air passing over the fabric. More specifically, the cross sectional shape of the groove can be one which provides the fabric with a desired air handling capacity, and need not be a
20 shape which provides mechanical locking of a coating.

Brief Description of the Drawings

Figure 1 is a cross-sectional view of the
25 grooved monofilament according to a first embodiment of present invention;

Figures 2A-2C illustrate a typical design for a die used to make the grooved monofilament in Figure 1;

30 Figure 3 shows a typical "tensile stress" vs. "strain" plot for the grooved monofilaments;

Figures 4(b) and 4(d) are optical photomicrographs of the sheet surfaces of sample fabrics with grooved monofilaments;

Figures 4(a) and 4(c) are the sheet surfaces of
5 typical prior art fabrics with circular monofilaments;

Figures 5(a) through 5(h) are cross-sectional views of grooved monofilaments, according to a second embodiment of the present invention; and

10 Figure 6 is a cross-sectional view of the bicomponent grooved monofilament according to a further embodiment of present invention.

Detailed Description of the Preferred Embodiments

15 A first embodiment of the present invention will be described in the context of a papermaking dryer fabric. However, it should be noted that the invention is applicable to the fabrics used in other sections of a paper machine,
20 as well as to those used in other industrial settings where surface smoothness and planarity, and controlled permeabilities to water and air are of importance. Some examples of other fabric types to which the invention is applicable include
25 papermaker's forming and press fabrics, through-air-drying (TAD) fabrics and pulp forming fabrics. Another example is of fabrics used in related-to-papermaking-processes such as sludge filters and chemiwashers. Yet another example of a fabric type
30 to which the invention is applicable is engineered fabrics, such as fabrics used in making non-woven

textiles in the wetlaid, drylaid, meltblown and/or spunbonding processes.

Fabric constructions include woven, spiral wound, knitted, extruded mesh, spiral-link, spiral coil, and other nonwoven fabrics. These fabrics may
5 comprise monofilament, plied monofilament, multifilament or plied multifilament yarns, and may be single-layered, multi-layered or laminated. The yarns are typically extruded from any one of the
10 synthetic polymeric resins, such as polyamide and polyester resins, used for this purpose by those of ordinary skill in the industrial fabric arts in addition to those made of metal or other material suitable for the purpose.

15 As one embodiment of the present invention, a grooved functional monofilament 1 is illustrated in Figure 1 (cross-sectional view). Note, while a circular shape is shown, the monofilament can obviously have a different cross-
20 sectional shape selected from one of rectangular, square, trapezoidal, oblong, oval, conical, pentalobe, star-shaped, or other non-circular shape suitable for the purpose. The monofilaments 1 may be incorporated in a fabric as functional CD yarns
25 as compared to stuffer yarns. In addition, the monofilaments 1 can also be incorporated in a fabric as MD yarns, or as both CD and MD yarns. The surface 2 of the monofilament 1 has a plurality of grooves 3 running along the length thereof. The
30 grooves 3 may be provided during the extrusion of the monofilament 1. While each groove 3 in Figure 1 has a C-shaped cross-section and is preferred in

certain applications, other groove shapes such as U-shaped, etc. may be used in other applications. In the case of the C-shaped grooves, note that the "open angle", which is defined as the angle centering at the origin of the "C" and facing its outlet, is much less than 180 degrees.

In the preferred embodiment, the grooved monofilament 1 is made of a particularly tough and strong polymer such as polyester(PET), or alternatively, polyamide (PA). However, the grooved monofilament 1 can consist of another filament/fiber forming thermoplastic polymer material such as poly(phenylene sulfide)(PPS), polyetheretherketone (PEEK), poly(aryletherketone)(PEK), polyethylene(PE) or polypropylene(PP).

Groove-shaped PET monofilaments are typically made through melt spinning using a die (sometimes referred to as a "spinneret"), and the die design is an important factor in shape extrusion. One typical die 4 is shown in Figures 2A-2C. Note that the cross-section of the capillary 5 is roughly circular with five projections 6 into the interior area of the capillary 5. The projections 6 have a circular shape. The inlet angle 7, which is defined as the angle centering at the origin of the projection circular shape and facing into the interior area of the capillary 5, is over 250 degrees. The diameter of the capillary 5 is about three times the size of the monofilaments to be produced. The ratio of length to diameter of the capillary 5 is about 3:1. Table 1 shows an example of the processing conditions for making the

PET grooved monofilaments using this die 4. Note that processing conditions depend on the particular fiber-forming material used.

5

Table 1

Processing Conditions for Preparing
Grooved PET Monofilaments.

Extruder	Die	Spin Pump	Melt & Quench	Draw & Relax	Throughput	Resin
Single Screw Screw Size: 1.5" Screw Design: D-S. Barrier, 3D, High Work	As Shown In Figure 1	Size:10cc Speed:3rpm	Melt:550-555°F Quench: 144°F	Draw 5 X @ 375°F Relax 0.12 @ 400°F	5.28 lbs./hr	Crystar from Dupont .95 IV

10

Tensile properties of the grooved PET monofilaments, prepared under the conditions in Table 1, were characterized using an Instron machine, with a crosshead speed of 10 inches per minute, and gage length of 10 inches. Figure 3 shows a typical "tensile stress" vs. "strain" plot for these grooved PET monofilaments, and their tensile properties are detailed in Table 2.

20

Table 2

Physical and Mechanical Properties
of the PET Grooved Monofilaments.

25

Denier (gm/9000m)	Diameter (mm)	Tenacity (GPD)	Break Elong. (%)	Shrinkage @200°C (%)	Loop Strength (GPD)
1669	0.55	3.64	25.0	11.0	2.87

The tensile properties of the grooved PET monofilaments indicated in Table 2 are comparable to those of PET monofilaments having other types of shapes. Further, by varying the processing

30

conditions for making the grooved monofilaments, their physical and mechanical properties can be optimized for different applications.

5 A sample fabric was produced, being made partially of the grooved monofilaments and was woven using a monoplan weave, forcing the CD yarn (the grooved filaments) to the sheet side. Measurements taken from the sample fabric and from a typical prior art fabric having conventional circular monofilaments show that the weavability of the
10 sample fabric was the same as the prior art fabric. Figures 4(b) and 4(d) are the optical photomicrographs of the sheet surfaces of the sample fabrics with the grooved monofilaments on top. Figures 4(a) and 4(c) are the surfaces of prior art
15 fabrics with circular monofilaments on top. The symmetric surface of the fabric with grooved monofilaments on top was found to "look" and "feel" better than that of the fabric with circular monofilaments on top. Further, the sample fabric
20 with grooved monofilaments on top exhibited considerably lower air permeability, e.g., 60 CFM, compared to a permeability of 103 CFM for the same style fabric with circular monofilaments on top. Advantageously, this reduced permeability is
25 achieved without using a coating and without using stuffer yarns.

Table 3

Air Permeability Testing.

filament	weave	filling (mm)	loc.	loom tension	H/S Perm.	cal. (in.)
grooved	960	0.40	TMB	650	60	.061
circular	960	0.40	TMB	650	103	.059

In addition to demonstrating reduced permeability, fabrics woven partially or completely with the grooved monofilaments exhibit improved adhesion to coatings, and to laminate substrates which would be mechanically coupled together by way of, for example, a flow of thermoplastic material from a thermoplastic laminate substrate which is heated. For example, the laminate substrate may comprise bicomponent yarns which upon heating causes the melting of a portion of such yarns which flows into the grooves and which upon setting, mechanically secures the laminate substrate to the grooved monofilaments. Tear resistance is also improved. These improvements are achieved through the mechanism of mechanical interlocking and surface roughening. Moreover, these improvements are effected regardless of the coating chemistry since it includes a mechanical interlock rather than solely a surface adhesion of the coating to the monofilament.

Yet a further advantage is provided in that bicomponent monofilaments can be made from these grooved monofilaments using solution or wire coating. Compared to typical prior art sheath-core monofilaments, it is believed that the bicomponent monofilaments will have much better delamination-

resistance because of mechanical interlock of the coating in the surface groove(s). One specific application of this type, for example, is the creation of conductive monofilaments made by coating
5 the grooved core monofilaments with a conductive coating.

In addition, as shown in Figure 6 (cross-sectional view), the bicomponent monofilament 20 may comprise a core 26 surrounded by a grooved sheath
10 22. Advantageously, the core 26 and the surrounding sheath 22 are visibly distinguishable from one another by, for example, their contrasting color. This enables the wear of fabrics comprising such monofilaments 20 to be monitored as abrasion
15 gradually wears away the sheath 22 of the monofilaments 20, eventually revealing the different colored core 26. This will result in a change in color of the fabric or portions thereof, indicating that its useful life has or was about to end. Note,
20 while a circular shape is shown, the bicomponent monofilament can obviously have a different cross-sectional shape suitable for the purpose.

As examples of a second embodiment of the invention, grooved monofilaments 10 are illustrated
25 in Figures 5(a) to 5(h) (cross-sectional view). Note that these monofilaments 10 can be incorporated in a fabric as MD yarns, CD yarns, or both CD and MD yarns. As can be seen, either or both the top and bottom surfaces 12 of the monofilaments 10 have one
30 or more grooves 14 running along the length thereof. The monofilaments 10 are typically die extruded from any of the materials previously discussed, and the

grooves 14 may be provided during the extrusion. Further, by varying the processing conditions for making the grooved monofilaments 10, their physical and mechanical properties can be optimized for different applications. Note also that the groove-to-yarn dimensions shown in the figures are merely illustrated and not drawn to scale.

For example, the grooved monofilament 10 can have a cross-sectional shape selected from one of rectangular, square, trapezoidal, oblong, oval, conical, pentalobe, star-shaped, or other non-circular shape suitable for the purpose. As one example, the grooved monofilaments 10 in Figures 5(a) through 5(h) have a rectangular cross section. In addition, each groove 12 of the monofilament 10 has a cross-sectional shape that can be U-shaped, key-way shaped, C-shaped, V-shaped, square, rectangular, trapezoidal, or other shape suitable for the purpose. As one example, the grooves 12 shown in Figures 5(a) through 5(f) have a U-shaped cross section. As another example, the grooves 12 in Figures 5(g) and 5(h) have a "key-way" shaped cross section. Note that the shape of the key-way groove 12 can vary, as long as the bottom of the groove 12 is wider than the top.

As illustrated in Figures 5(a) and 5(b), the top surface 12 of the grooved monofilament 10 preferably has the same profile as the bottom surface 12. This makes manufacture of a woven fabric much easier since it does not matter if the grooved monofilament 10 turns over during weaving. In this connection, note that the top and bottom

grooves 12 are aligned. In addition, the grooves 12 can be offset, as shown in Figure 5(d), so to limit the risk of splitting of the monofilament 10.

Advantageously, the grooved monofilaments
5 10 exhibit improved attachment of coatings, as compared to conventional circular monofilaments. For example, a sheet-gripping coating applied to the grooved monofilaments 10 will last up to a year, as compared to coatings applied to circular yarns which
10 may wear off in weeks. These improvements are achieved through the mechanism of mechanical interlocking and surface roughening. Moreover, these improvements are effected regardless of the coating chemistry since it includes a mechanical
15 interlock rather than solely a surface adhesion of the coating to the grooved monofilament 10.

In connection with a further advantage provided by the present invention, note that when ungrooved flat (rectangular) yarns come in contact
20 with a sheet (not shown), heat and consequently steam builds up (is trapped) in the sheet surface (upper strata) or between the sheet and the yarn knuckle. When the sheet is then removed from a dryer fabric surface, this steam is locally
25 "violently" released causing sheet surface disruption which can cause problems such as dusting. On the other hand, where the flat yarn is grooved according to the present invention, there is a place for the heat and/or steam to vent so to prevent this
30 localized disruption.

In addition to exhibiting increased venting of moisture, fabrics woven partially or

completely with the grooved monofilaments 10 demonstrate improved air handling, as compared to prior art monofilaments with circular cross sections. Advantageously, the grooves 12 of the
5 inventive monofilaments 10 provide channels for the air passing over the fabric. In connection with this feature, the cross sectional shape of the grooves 12 need not necessarily be one that mechanically locks with a coating. As a further
10 benefit, the grooves 12 increase the void volume of the fabric without increasing its caliper (thickness). This feature is particularly advantageous in single-run configurations on papermaking machines.

15 In addition, wide flat grooved monofilaments 10 demonstrate reduced sheet marking, as compared with wide, flat ungrooved yarns. For example, in the case of a wide yarn 10 having three or four "key-way" grooves 14 as shown in Figure
20 5(g), a sheet surface (not shown) is in effect "seeing" a series of smaller yarns with spaces between, so a reduced (or eliminated) chance of marking is provided.

Finally, advantages are provided by a
25 fabric having the inventive grooved yarns in both the MD and CD directions, as compared to prior art fabrics with conventional yarns. These advantages include a thinner fabric; lower permeability; greater stability; improved sheet contact; and
30 elimination of places for contamination, debris or dust to be trapped at yarn crossovers.

Modifications to the above would be obvious to those of ordinary skill in the art, but would not bring the invention so modified beyond the scope of the present invention. The claims to
5 follow should be construed to cover such situations.

We Claim:

1. A fabric comprising a plurality of uncoated functional monofilaments having a grooved-shaped cross-section and having reduced air permeability compared with a fabric not having said monofilaments.

2. The fabric of claim 1 wherein a surface of each respective monofilament has a plurality of grooves formed thereon.

3. The fabric of claim 2 wherein each groove is C-shaped.

4. The fabric of claim 2 wherein each groove has an open angle less than 180 degrees.

5. The fabric of claim 1 wherein the fabric is a forming, press, dryer, TAD, pulp forming, sludge filter, chemiwasher, or engineered fabric.

6. A monofilament having a plurality of longitudinal grooves formed in its surface.

7. The monofilament of claim 6 wherein each groove is C-shaped.

8. The monofilament of claim 6 wherein each groove has an open angle less than 180 degrees.

9. The monofilament of claim 6 wherein coating adhesion is improved.

10. The monofilament of claim 6 wherein the grooved monofilament is made of a material selected from the group consisting essentially of polyester,
5 polyamide, poly(phenylene sulfide), polyetheretherketone, poly(aryl ether ketone), polyethylene, and polypropylene.

11. A fabric comprising a plurality of
10 grooved-shaped functional monofilaments and having improved adhesion to coatings compared with a fabric not having said grooved-shaped monofilaments.

12. The fabric of claim 11 wherein said fabric
15 has improved adhesion to lamination substrates mechanically interlocked by way of a flow of thermoplastic material.

13. The fabric of claim 11 wherein the
20 improved adhesion is achieved due to mechanical interlock regardless of the coating chemistry.

14. The fabric of claim 11 wherein the
25 improved adhesion is achieved by an interlocking mechanism between the coating and the yarns in the fabric.

15. The fabric of claim 11 wherein the fabric
30 is a forming, press, dryer, TAD, or engineered fabric.

16. A bicomponent monofilament made from a coated grooved-shaped monofilament.

17. The bicomponent monofilament of claim 16
5 having improved delamination resistance due to the mechanical interlock between the coating and grooves compared with a bicomponent monofilament not made from a coated grooved-shaped monofilament.

10 18. The bicomponent monofilament of claim 16 wherein the bicomponent monofilament is made using solution coating.

15 19. The bicomponent monofilament of claim 16 wherein the bicomponent monofilament is made using wire coating.

20 20. The bicomponent monofilament of claim 16 wherein said bicomponent monofilament has a conductive coating.

21. A die used for extruding groove-shaped monofilaments and having a capillary cross section with a plurality of projections oriented towards an
25 interior of the capillary, wherein an angle centering at the origin of a respective projection and facing into said interior is over 250 degrees, and the open angle defined as the angle centering at the origin of a C and facing its outlet is much less
30 than 180 degrees.

22. The die of claim 21 wherein a diameter of the capillary is approximately three times the size of the monofilaments to be produced.

5 23. The die of claim 21 wherein the ratio of length to diameter of the capillary is approximately 3:1.

10 24. The die of claim 21 wherein the monofilaments to be produced are made of PET.

15 25. The die of claim 21 wherein the monofilaments are extruded according to a melt spinning process.

20 26. A monofilament having one or more grooves, said grooved monofilament having improved adhesion to coatings compared with a round ungrooved monofilament and provides for improved air handling.

25 27. The monofilament of claim 26 wherein the groove's cross sectional shape is one of U-shaped, key-way shaped, C-shaped, V-shaped, square, rectangular, or trapezoidal.

30 28. The monofilament of claim 26 wherein the monofilament is square or rectangular in shape with a top surface of the monofilament having the same profile as a bottom surface.

 29. The monofilament of claim 26 wherein the monofilament is square or rectangular in shape with

a top surface having a different profile than a bottom surface.

30. The monofilament of claim 29 wherein the
5 groove(s) formed in the top surface are offset from the groove(s) formed in the bottom surface.

31. The monofilament of claim 28 wherein
10 groove(s) formed in the top surface are aligned with groove(s) formed in the bottom surface.

32. The monofilament of claim 26 wherein the
15 improved adhesion is achieved due to mechanical interlock regardless of the coating chemistry.

33. The monofilament of claim 26 wherein the
improved adhesion is achieved by an interlocking mechanism between the coating and monofilaments.

20 34. The monofilament of claim 26 wherein the grooved monofilament is made from one of polyester, polyamide, poly(phenylene sulfide), polyetheretherketone, poly(aryl ether ketone), polyethylene, polypropylene and metal.

25 35. The monofilament of claim 26 wherein the grooved monofilament is made by die extrusion.

30 36. A fabric comprising a plurality of monofilaments, said monofilaments having one or more longitudinal grooves, said fabric exhibiting

improved air handling compared with a fabric not having said monofilaments.

37. The fabric of claim 36 wherein the grooves
5 in the monofilaments channel air passing over the fabric.

38. The fabric of claim 36 wherein the grooves
in the monofilaments increase a void volume of the
10 fabric without increasing the fabric's caliper.

39. The fabric of claim 36 wherein the cross
sectional shape of the grooves in the monofilaments
is one which provides the fabric with an air
15 handling capacity.

40. The fabric of claim 36, wherein the
grooved monofilaments are incorporated as both MD
yarns and CD yarns, said fabric exhibiting a thinner
20 caliper, reduced permeability, greater stability,
improved sheet contact, and reduced dusting, as
compared with a fabric not having said
configuration.

41. The fabric of claim 36 wherein said
25 grooves in the monofilaments provide venting of
moisture at a point of contact between the
monofilaments and a sheet on the fabric.

42. The fabric of claim 36 wherein the fabric
30 is a forming, press, dryer, TAD, pulp forming,
sludge filter, chemiwasher, or engineered fabric.

43. The fabric of claim 36 wherein the groove's cross sectional shape is one of a U-shaped, key-way shaped, C-shaped, V-shaped, square, rectangular, or trapezoidal.

44. The fabric of claim 36 wherein the monofilament is square or rectangular in shape with a top surface of the monofilament having the same profile as a bottom surface.

45. The fabric of claim 36 wherein the monofilament is square or rectangular in shape with a top surface having a different profile than a bottom surface.

46. The fabric of claim 45 wherein the groove(s) formed in the top surface of the monofilaments are offset from the groove(s) formed in the bottom surface of the monofilaments.

47. The fabric of claim 44 wherein groove(s) formed in the top surface of the monofilaments are aligned with groove(s) formed in the bottom surface of the monofilaments.

48. The fabric of claim 36 wherein the grooved monofilament is made from one of polyester, polyamide, poly(phenylene sulfide), polyetheretherketone, poly(aryl ether ketone), polyethylene, polypropylene and metal.

49. The fabric of claim 36 wherein the grooved monofilament is made by die extrusion.

50. The monofilament of claim 26 wherein the
5 monofilament is square or rectangular in shape with
a top surface of the monofilament having at least
three key-way shaped grooves therein.

51. The monofilament of claim 50 wherein said
10 monofilament is less likely to mark a sheet than a
monofilament not having said configuration.

52. A filament comprised of a core surrounded
by a grooved sheath, the core and the sheath being
15 distinguishable from one another by their differing
color, wherein a color change of a fabric comprising
said filaments indicates wear thereof.

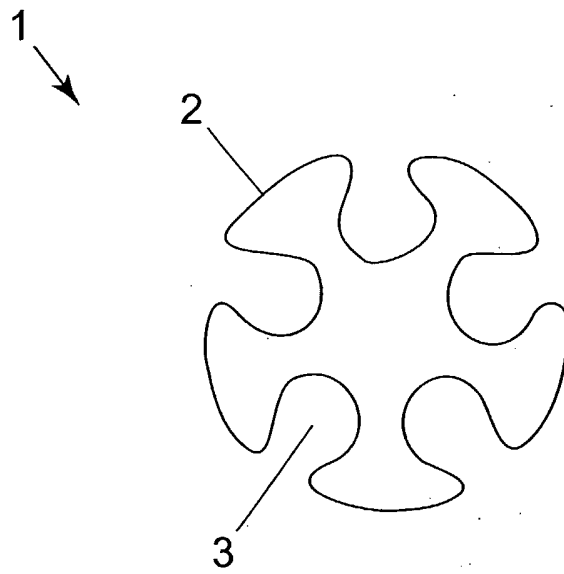


FIG. 1

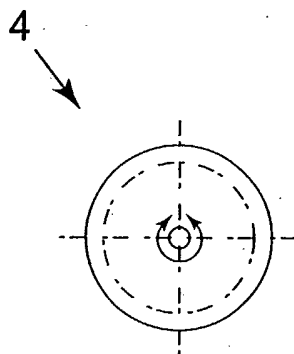


FIG. 2A

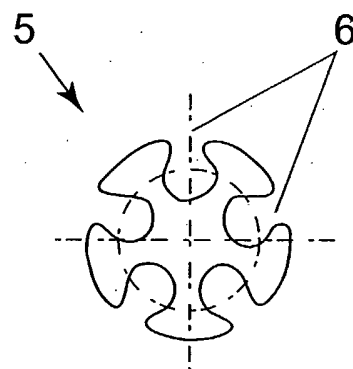


FIG. 2B

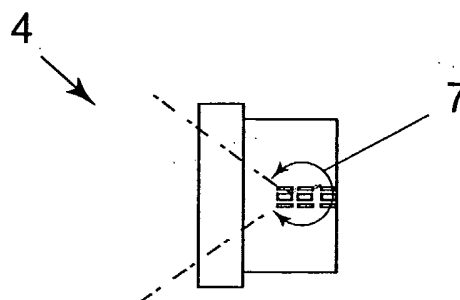


FIG. 2C

Stress (GPD)

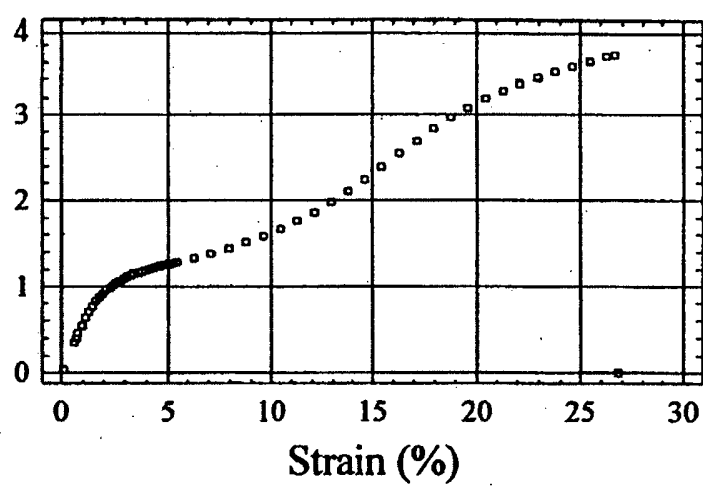


FIG. 3

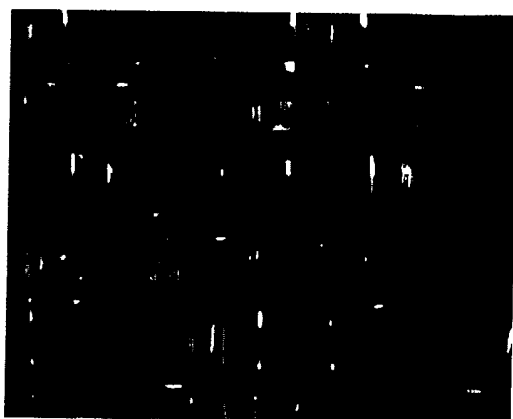


FIG. 4A



FIG. 4B

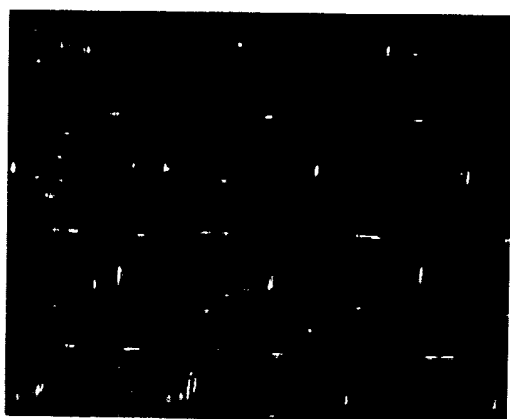
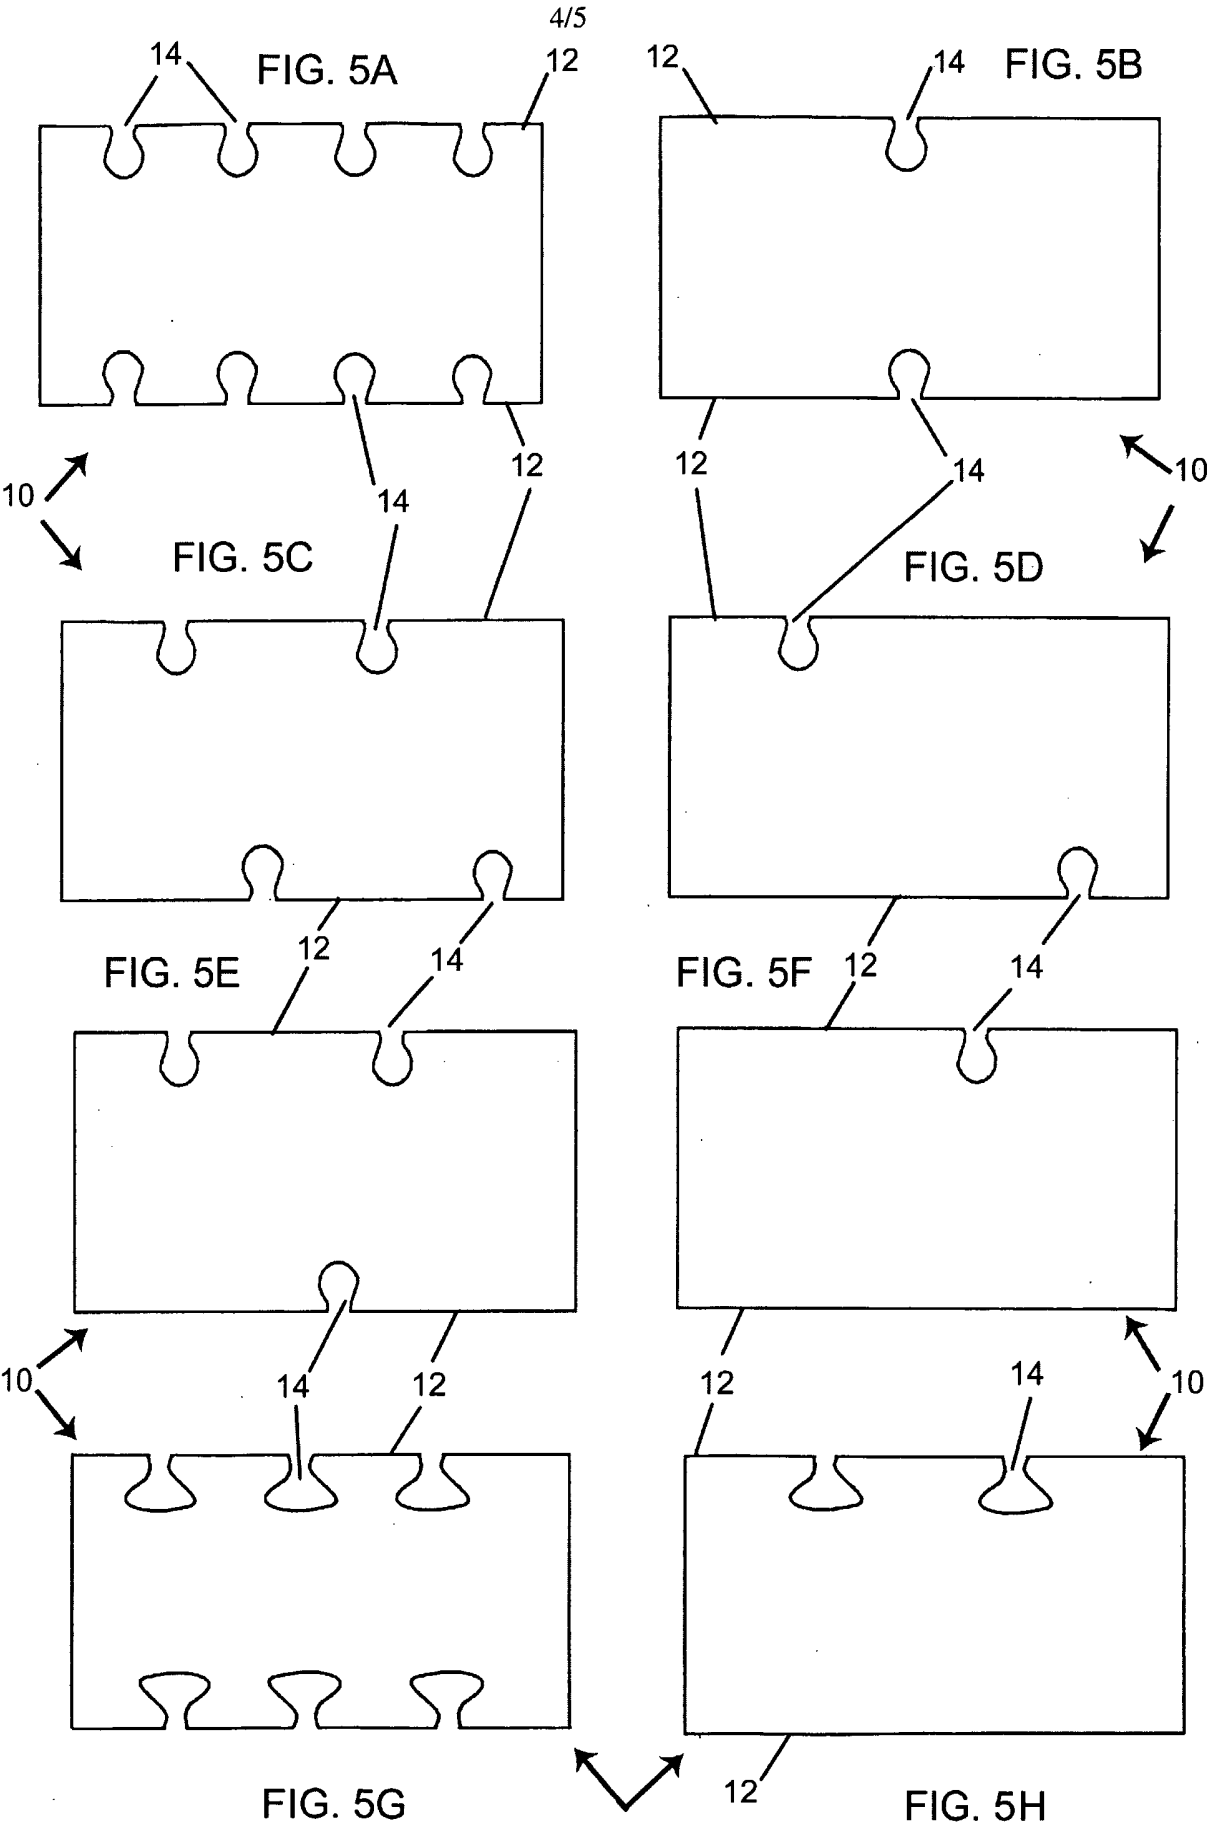


FIG. 4C



FIG. 4D



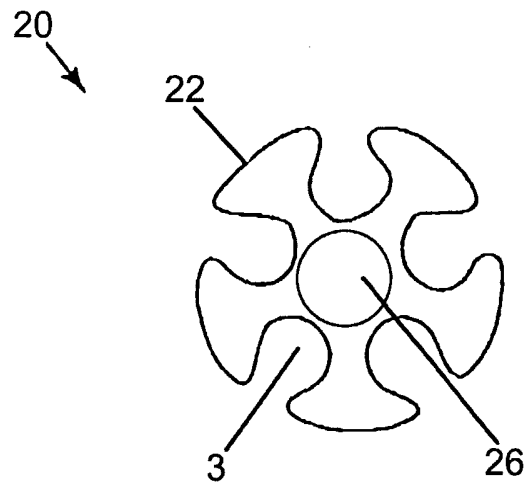


FIG. 6