

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
22 June 2006 (22.06.2006)

PCT

(10) International Publication Number
WO 2006/065454 A1

(51) International Patent Classification:
D21F 1/00 (2006.01)

(21) International Application Number:
PCT/US2005/042034

(22) International Filing Date:
21 November 2005 (21.11.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/012,512 15 December 2004 (15.12.2004) US

(71) Applicant (for all designated States except US): **ALBANY INTERNATIONAL CORP.** [US/US]; 1373 Broadway, Albany, NY 12204 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **BILLINGS, Alan, L.** [US/US]; 18 Kingswood Drive, Clifton Park, NY 12065 (US).

(74) Agent: **SANTUCCI, Ronald, R.**; Frommer Lawrence & Haug LLP, 745 Fifth Avenue, New York, NY 10151 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: IMPROVED SPIRAL FABRICS

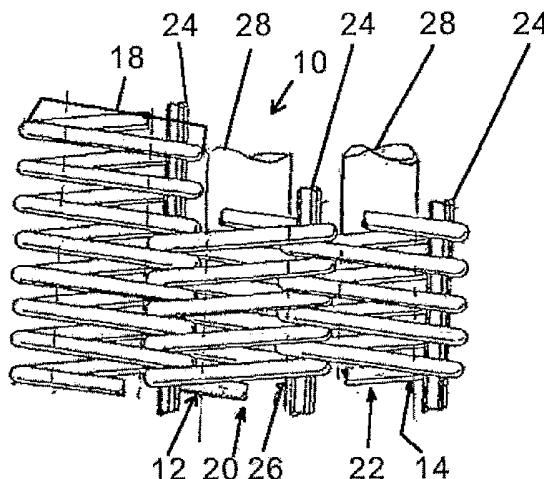

(57) Abstract: A spiral-link fabric (10) for use in a papermaking machine or the like. The spiral-link fabric may include a plurality of spiral coils (12, 14) arranged in a predetermined manner such that adjacent ones of side-by-side spiral coils are interdigitated with each other so as to form a channel (26) and interconnected by a pintle (24) extending through the channel (26). At least some of the plurality of spiral coils have a coil width of approximately 12 nun or larger. The ratio of coil thickness to coil width may be approximately 0.5 or less.

WO 2006/065454 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

IMPROVED SPIRAL FABRICS

BACKGROUND OF THE INVENTION

Field of the Invention

5 The present invention relates to spiral fabrics. More specifically, the present invention relates to spiral-link fabrics having coils with relatively large widths utilized on a papermaking machine and other industrial applications.

Description of the Related Art

10 During the papermaking process, a cellulosic fibrous web is formed by depositing a fibrous slurry, that is, an aqueous dispersion of cellulose fibers, onto a moving forming fabric in a forming section of a paper machine. A large amount of water is drained from the slurry through the forming fabric, leaving the cellulosic fibrous web on the surface of the forming fabric.

15 The newly formed cellulosic fibrous web proceeds from the forming section to a press section, which includes a series of press nips. The cellulosic fibrous web passes through the press nips supported by a press fabric, or, as is often the case, between two such press fabrics. In the press nips, the cellulosic fibrous web is subjected to compressive forces which squeeze water therefrom, and which adhere the cellulosic fibers in the web to one another to turn the cellulosic fibrous web into
20 a paper sheet. The water is accepted by the press fabric or fabrics and, ideally, does not return to the paper sheet.

 The paper sheet finally proceeds to a dryer section, which includes at least one series of rotatable dryer drums or cylinders, which are internally heated by steam. The newly formed paper sheet is directed in a serpentine path sequentially
25 around each in the series of drums by a dryer fabric, which holds the paper sheet closely against the surfaces of the drums. The heated drums reduce the water content of the paper sheet to a desirable level through evaporation.

 It should be appreciated that the forming, press and dryer fabrics all take the form of endless loops on the paper machine and function in the manner of
30 conveyors. It should further be appreciated that paper manufacture is a continuous

process which proceeds at considerable speeds. That is to say, the fibrous slurry is continuously deposited onto the forming fabric in the forming section, while a newly manufactured paper sheet is continuously wound onto rolls after it exits from the dryer section.

5 Fabrics in modern papermaking machines may have a width of from 5 to over 33 feet, a length of from 40 to over 400 feet and weigh from approximately 100 to over 3,000 pounds. These fabrics wear out and require replacement. Replacement of fabrics often involves taking the machine out of service, removing the worn fabric, setting up to install a fabric and installing the new fabric.

10 For example, because of the solid support beams for dryer sections, all dryer fabric must have a seam. Installation of the fabric includes pulling the fabric body onto a machine and joining the fabric ends to form an endless belt. The seam region of any workable fabric must behave in use as close to the body of the fabric in order to prevent the periodic marking by the seam region of the paper product
15 being manufactured.

A fabric may be formed completely of spiral coils (so called "spiral-link fabric") as taught by Gauthier, U.S. Patent 4,567,077; which is incorporated herein by reference. In such a fabric, spiral coils are connected to each other by at least one connecting pin, pintle or the like. In theory, the seam can therefore be at any
20 location in the fabric body where a connecting pin may be removed. Spiral-link fabrics offer a number of advantages over traditional fabric. For example, the seam of a spiral-link fabric is geometrically similar to the fabric body, and thus is less likely to mark the paper sheet. In addition, spiral-link fabrics may withstand flattening, thus imparting constant permeability to fluids (in particular air) which
25 would otherwise pass therethrough. Due to these advantageous features, spiral-link fabrics are used in papermaking machines, particularly for drying sheets of paper wherein water vapor is removed which passes through the spiral-link fabric. Spiral link fabrics have other industrial applications where they act as industrial conveyors and may be coated or otherwise impregnated with a resin depending
30 upon the application.

Unfortunately, the production of spiral-link fabrics is both labor-intensive and expensive. For example, spiral-link fabrics are constructed of many small spiral elements that must be coiled and assembled. The multiple manufacturing steps of coiling, interdigitating, and interconnecting spiral coils makes the process costly. In addition, it is difficult to interconnect the spiral coils because a pin, pintle or the like is inserted through small channels formed from the interdigitated spiral coils. Production time for such fabric is compounded because the small width of the spiral coils requires a large number of pintles, as fabrics may be formed in a width of from 5 to over 33 feet and a length of from 40 to over 400 feet. Further, the large number of pintles substantially covers the fabric resulting in a fabric that is diagonally stiff during operation.

In addition, "stuffers" in the form of yarns or the like are typically inserted within the inner space of each spiral coil to lower the permeability of the fabric. Currently, stuffers are pushed or stuffed into the inner space of each spiral coil one portion at a time. As is to be appreciated, such stuffing method limits the material which may be used as stuffers because the stuffer must be sufficiently stiff or rigid to facilitate insertion into the small coil opening and across the full width of the fabric. Further, because the stuffers are pushed into the fabric, the process of inserting the stuffers may be slow and labor-intensive.

The present invention overcomes these shortcomings by providing a spiral-link fabric with wide spiral coils.

SUMMARY OF THE INVENTION

The inventors of the present invention have recognized that a spiral-link fabric having wide spiral coils may overcome the shortcomings of the prior art.

Accordingly, a spiral-link fabric for use in a papermaking machine or other industrial application is provided which may include a plurality of side-by-side spiral coils. The spiral coils may be interdigitated and interconnected by a series of parallel pintles extending through channels formed from the interdigitated spiral coils. Each spiral coil has a width of approximately 12 mm or larger. The ratio of the coil width to the coil thickness can be about 0.5 or less. These larger spiral

coils allow for versatility in selecting stuffers not heretofore realized, such that they may go beyond their traditional role involving permeability.

The present invention will now be described in more complete detail with reference being made to the figures wherein like reference numerals denote like elements and parts, which are identified below.

BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding of the invention, reference is made to the following description and accompanying drawings, in which:

FIGs. 1a and 1b are views of a spiral-link fabric in accordance with an embodiment of the present invention;

FIG. 2 is a diagram of a pintle usable in the present spiral-link fabric; and

FIG. 3 is a photograph of present spiral-link fabrics with stuffer inserts.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

A preferred embodiment of the present invention will be described in the context of a papermaking dryer fabric. However, it should be noted that the present invention may be used in other sections of a papermachine, as well as in other industrial settings where spiral-link fabrics have heretofore found application as industrial fabrics. Accordingly, the invention should be.

FIGs. 1a and 1b are views of a spiral-link fabric 10 in accordance with an embodiment of the present invention. Spiral-link fabric 10 may include a plurality of side-by-side spiral coils, such as coils 12 and 14, with each coil having a coil thickness and a coil width 18. Spiral coils 12 and 14 are substantially disposed in a direction transverse relative to the longitudinal axis of the fabric (which is along the running or machine direction of the fabric). The turns of spirals 12 and 14 may be inclined in a predetermined manner. Spirals 12 and 14 are interdigitated and interconnected by a series of parallel or substantially parallel pintles or pins 24, or the like, extending through channels 26 formed from the interdigitated spiral coils 12 and 14. Further, stuffer inserts 28 may be inserted or otherwise disposed within openings 20 and 22 of spirals 12 or 14.

The present invention provides spiral coils 12 and 14 that are significantly wider than prior art designs. For example, coil width 18 may be from about 12 mm to 150 mm or about 0.5 to 6 inches. Further, spiral coils 12 and 14 may have a ratio of coil thickness 16 to coil width 18 of approximately 0.5 or less.

5 As a general example of the present invention, spiral coils 12 and 14 may be round in cross section having a coil thickness 16 of 3.3 mm and a coil width 18 of 28.5 mm. Spiral coils 12 and 14 would then have a ratio of coil thickness 16 to coil width 18 of about 0.11.

10 Further, spiral coils 12 and 14 may be formed of a polymer (such as polyester), metal or other material suitable for this purpose known to those so skilled in the art. As is appreciated, the starting yarn or material, e.g., a monofilament, used to make the spiral coils 12 and 14 may be in various shapes. It may be, for example, round, rectangular, oval, or may be flattened, which shape may be determined by one of skill in the art on the basis of the ultimate use of the spiral-link fabric and the performance specifications required therefore. Further, spiral coils 12 and 14 may be formed from a monofilament or multifilament material, which, if they are multifilament, may be treated or coated if necessary to ensure that the coils retain the ability to maintain their shape. The spiral coils 12 and 14 themselves may take on various shapes from, for example, round or helical to oval, as shown in the figures.

20 The wider spiral coils of the present invention provide advantages over current spiral-link fabric designs. For example, coil width 18 determines the number of coils per length of fabric. A wider coil means less coils or assemblies per length of fabric which may result in faster production of the fabric. Because the wider coils of the present invention may require fewer pintles to interconnect per length of fabric, the spiral fabrics may be easier to form and may require less labor and cost. Further, the wider spiral coils of the present invention may allow easy and quick installation of pintles 24 through channels 26. Accordingly, the present invention may effectively reduce the time and cost for manufacturing fabric

30 10.

Pintle 24 may be pre-crimped or may have a stepped diameter. That is, the diameter of pintle may not be the same throughout its length. As shown in FIG. 2, first portion 25 has a first diameter and second portion 27 has a second diameter different than the first diameter. In this way, pintles 24 may provide wider coil spacing and use less material. It is also contemplated by the present invention that the pintles may alternatively have a non-round shape, or may be deformable under pressure. Further, the pintles 24 may be flexible and may reduce diagonal stress/strain of the fabric during operation.

In addition, the spiral coils of the present invention, while functioning as the primary structural members of the fabric in all directions, also serve as carriers for stuffer inserts 28. For example, spiral coils 12 and 14 provide the fabric's MD strength and continuum as well as providing the "seam" or basis for becoming an endless belt. However, as the spiral coils of the present invention are wider than those of the prior art, and accordingly may accommodate larger stuffers than are possible in the prior art, it is also a facet of the present invention that the stuffers may also impart structural characteristics to the spiral-link fabric. For example, the composition of the stuffer inserts may alter the CD stiffness and the diagonal stress/strain of the spiral-link fabric. Accordingly, stuffer insert 28 may be designed to optimize fabric properties and characteristics, for example, permeability.

FIG. 3 is a photograph of side-by-side view of portions of spiral-link fabrics 30 and 32 in accordance with an embodiment of the present invention. As shown, fabric 30 and 32 have relatively wide spiral coils 34 and 36 which provide inner spaces for insertion of stuffer inserts 40 and 42. Stuffer inserts 40 and 42 may be formed from one or more different materials, which may be rigid or flexible.

The stuffer inserts of the present invention may be formed from a material which is woven, knitted, or molded, or may be formed from extruded sheets of polymeric material or films, and may be continuous or formed from a number of discontinuous portions. In addition, the stuffer insert may be simply disposed within a spiral coil, or attached or fixed to the spiral coils. If fixed, the stuffer

inserts may be fixed to spiral coils at its edges, center or at multiple points along the coils. The stuffer insert may include edges having grooves, ridges or so forth to facilitate the fixing of the stuffer insert to the coils. In addition, the stuffer insert may be stretched or relaxed to obtain a desired permeability or permeability profile for the fabric.

Further, the present invention includes stuffer inserts that are non-uniform in at least one dimension throughout the length of each individual stuffer. In many dryer sections, the sheet moisture profile is such that the sheet edges are drier than the center. A fabric that is more permeable in the center would contribute to flattening this unwanted non-uniform profile. For instance, in a spiral link fabric of the present invention, a stuffer insert may have one effective diameter along its length at the ends or edges of the fabric and a second effective diameter at the fabric center. Effective diameter is a relative term to define the ability of both round and nonround cross section stuffers to affect the fabric characteristic desired. The effective diameter of the stuffer near the fabric edges can be greater than that at the center of the fabric. This results in the spiral link fabric to have edge areas with a lower permeability than the fabric center, so as to correct the sheet moisture profile. Of course, if the sheet profile is such that the edges are wet and the center is dry, a spiral link fabric with stuffer inserts so designed as to make the center area less permeable than the fabric edges can also be constructed. Alternatively, various mechanical alterations of the stuffer, including but not limited to crimps, folds, perforations and the like may be distributed throughout the stuffer in a non-uniform manner. Such a stuffer of the present invention may include a stuffer that has been "crimped" or "folded" in such a manner that the number of "crimps" or "folds" dispersed throughout the length of the stuffer. For example, a stuffer may have a larger number of "crimps" or "folds" dispersed throughout the ends of the stuffer than are present in the center of the stuffer.

As is to be appreciated, current stuffer designs must be sufficiently stiff and rigid so as to be able to be pushed into the small coil openings and across the full width of the spiral-link fabric. This typically involved the use of yarns. In

contrast, the wide spiral coils of the present invention enable the stuffer inserts to be pulled through the spiral coils. The stuffer insert may be pulled by a rapier, gripper, or the like. In this way, the process to make the spiral-link fabric may be formed faster and may be less labor-intensive. Accordingly, the present invention
5 may effectively reduce the time and cost for manufacturing a fabric. As is appreciated, there may be other ways of pulling the stuffer insert within the spiral coils of the present invention as known to those so skilled in the art.

Further, the stuffer inserts of the present invention may be formed of softer, more flexible and less expensive materials than prior art stuffers because the stuffer
10 insert may now be pulled through the fabric instead of pushed through. As a result, the present fabric may be more flexible and less diagonally stiff than prior art spiral-link fabrics, improving the guiding and tracking of the fabric.

Thus, the present invention's advantages are realized, and although preferred embodiments have been disclosed and described in detail herein, its
15 scope and objects should not be limited thereby; rather its scope should be determined by that of the appended claims.

WHAT IS CLAIMED IS:

1. A spiral-link fabric for use in a papermaking machine comprising a plurality of spiral coils arranged in a predetermined manner such that adjacent ones of side-by-side spiral coils are interdigitated with each other so as to form a channel and interconnected by a pintle extending through the channel, wherein at least some of the plurality of spiral coils have a coil width of approximately 12 mm or larger.
2. The spiral-link fabric of claim 1, wherein each spiral coil has a coil thickness associated therewith, and wherein a ratio of the coil thickness to coil width is approximately 0.5 or less.
3. The spiral-link fabric of claim 1, wherein the spiral coils are formed from monofilaments; or multifilaments which are coated.
4. The spiral-link fabric of claim 3, wherein the monofilaments are round, rectangular, oval, flattened or other noncircular shape.
5. The spiral-link fabric of claim 1, wherein the pintle is selected from the group consisting of: round pintles, non-round pintles, pre-crimped pintles, and stepped diameter pintles.
6. The spiral-link fabric of claim 1, further comprising a stuffer insert disposed within one or more spiral coils.
7. The spiral-link fabric of claim 6, wherein the stuffer insert comprises a material which is woven, knitted, or molded, or formed from extruded sheets of polymeric material or films.
8. The spiral-link fabric of claim 6, wherein the stuffer insert is non-uniform in at least one dimension along its length.

9. The spiral-link fabric of claim 8, wherein the stuffer insert has a varying effective diameter along its length.

5 10. The spiral-link fabric of claim 8, wherein the stuffer insert has crimps, folds, and/or perforations distributed in a non-uniform manner throughout the length and/or diameter thereof.

10 11. The spiral-link fabric of claim 1, further comprising a stuffer insert disposed within one or more spiral coils and, wherein the fabric has a variable permeability along its width.

15 12. The spiral-link fabric of claim 1, wherein the spiral coils have a circular, oval or other noncircular shape.

13. The spiral-link fabric of claim 1, wherein the plurality of spiral coils have a coil width in the range of approximately 12 mm to 150 mm.

20 14. The spiral-link fabric of claim 1, wherein the stuffer insert includes edges having grooves or ridges.

15. The spiral-link fabric of claim 1, wherein the stuffer insert is attached or fixed to the respective spiral coil.

25 16. The spiral-link fabric of claim 1, wherein the stuffer insert is continuous or discontinuous.

17. A method of forming a spiral-link fabric for use in a papermaking machine comprising the steps of:

arranging a plurality of spiral coils in a predetermined manner such that adjacent ones of side-by-side spiral coils are interdigitated with each other so as to form a channel;

5 extending a pintle through each said channel formed from the interdigitated spiral coils; and

wherein at least some of the plurality of spiral coils have a coil width of approximately 12 mm or larger.

10 18. The method of claim 17, wherein each spiral coil has a coil thickness associated therewith, and wherein a ratio of the coil thickness to coil width is approximately 0.5 or less.

19. The method of claim 17, further comprising the step of inserting a stuffer insert through at least one spiral coil.

15 20. The method of claim 19, wherein the stuffer insert is pulled through the at least one spiral coil.

1/2

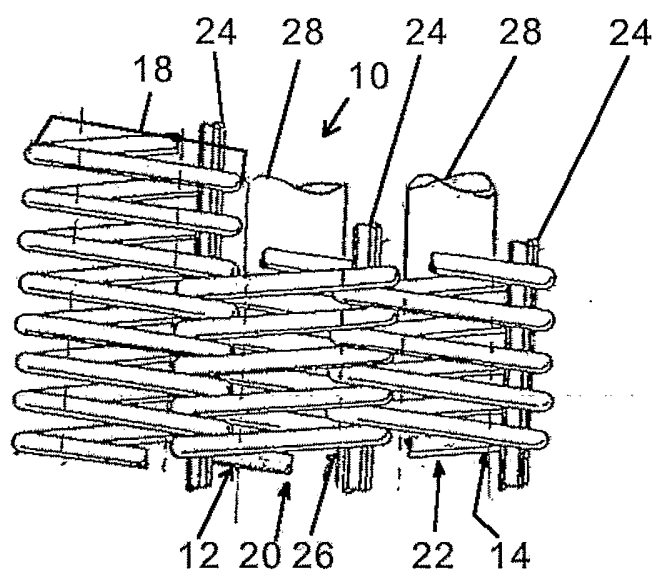


FIG. 1A

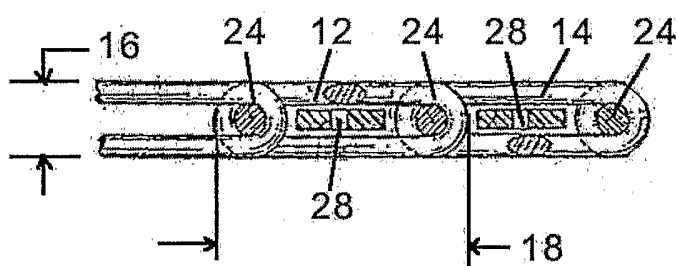


FIG. 1B


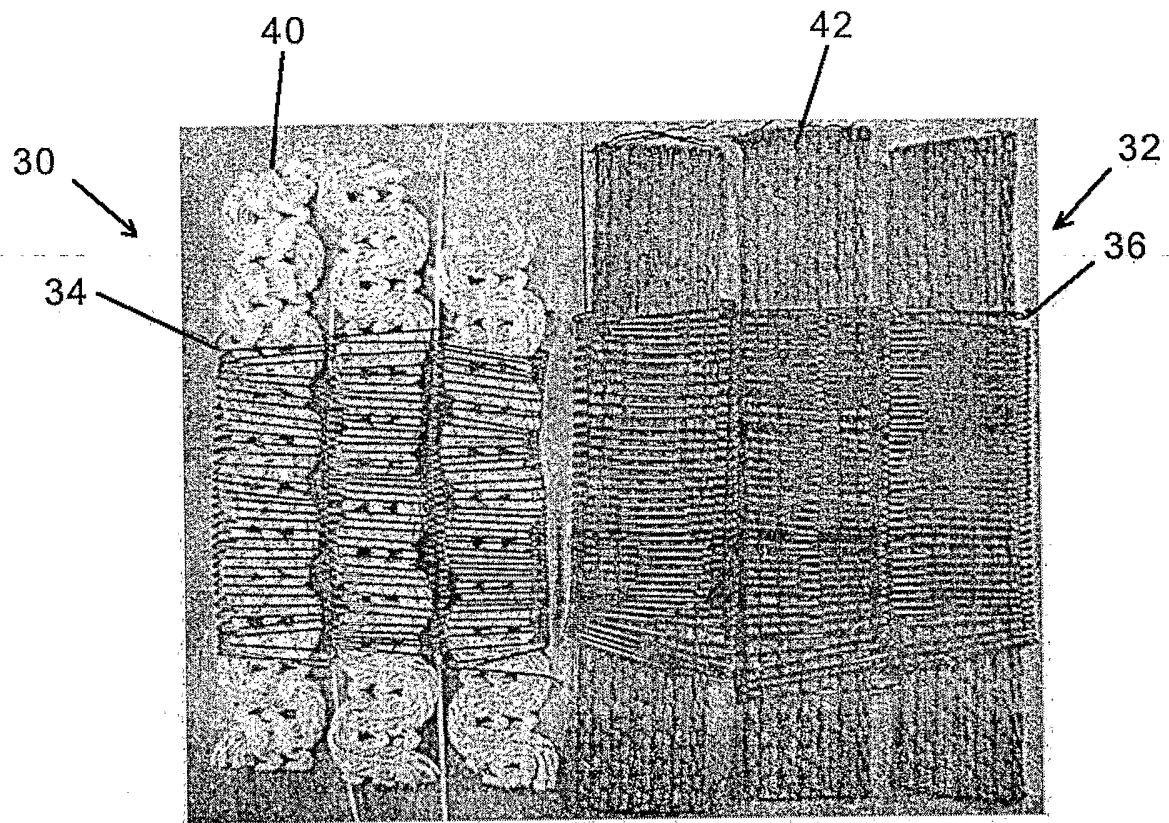


FIG. 2

2/2

**FIG. 3**

INTERNATIONAL SEARCH REPORT

ational application No

/US2005/042034

A. CLASSIFICATION OF SUBJECT MATTER
INV. D21F1/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

D21F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	FR 2 064 159 A (KALLE AG) 16 July 1971 (1971-07-16) the whole document	1-5, 12, 13, 17, 18
A	US H2 081 H (LEE) 2 September 2003 (2003-09-02) the whole document	1, 2, 5-7, 12, 17-20
A	US 4 346 138 A (LEFFERTS) 24 August 1982 (1982-08-24) the whole document	1-5, 12, 17, 18
A	US 4 583 302 A (SMITH) 22 April 1986 (1986-04-22) the whole document	1, 3-8, 11, 12, 15-17, 19, 20
	-/-	

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the International filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

27 April 2006

Date of mailing of the international search report

08/05/2006

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

De Rijck, F

INTERNATIONAL SEARCH REPORT

International application No

/US2005/042034

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 33 01 041 A (J. J. MARX GMBH) 19 July 1984 (1984-07-19) the whole document	1,3-8, 11,12, 15-17, 19,20
A	US 4 567 077 A (GAUTHIER) 28 January 1986 (1986-01-28) the whole document	1,3-9, 12,14, 16,17, 19,20
A	EP 0 190 732 A (SITEG SIEBTECHNIK GMBH) 13 August 1986 (1986-08-13) the whole document	1,3-7, 12,16, 17,19,20

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No
.../US2005/042034

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
FR 2064159	A	16-07-1971	BE 757059 A1 CA 937080 A1 CH 508473 A DE 1950302 A1 JP 49016115 B NL 7014659 A	05-04-1971 20-11-1973 15-06-1971 22-04-1971 19-04-1974 08-04-1971
US H2081	H	02-09-2003	NONE	
US 4346138	A	24-08-1982	AR 223508 A1 AU 531985 B2 BR 8001262 A CA 1117800 A1 EP 0017722 A1 ES 8200425 A1 ES 8202082 A1 FI 800129 A MX 149880 A NO 800050 A NZ 192900 A US 4392902 A	31-08-1981 15-09-1983 04-11-1980 09-02-1982 29-10-1980 16-01-1982 01-04-1982 24-10-1980 25-01-1984 24-10-1980 15-07-1983 12-07-1983
US 4583302	A	22-04-1986	NONE	
DE 3301041	A	19-07-1984	NONE	
US 4567077	A	28-01-1986	CA 1163484 A1 FR 2494318 A1 US 4719139 A	13-03-1984 21-05-1982 12-01-1988
EP 0190732	A	13-08-1986	AU 5287386 A BR 8600543 A FI 860481 A JP 61186596 A NO 855121 A ZA 8600841 A	14-08-1986 21-10-1986 09-08-1986 20-08-1986 11-08-1986 29-10-1986