



Spiralsolution 43500 FSL

Data sheet (heat set fabric)

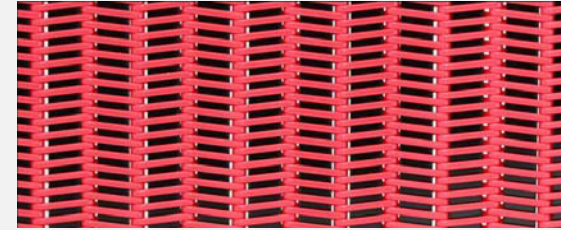

Technical Data

| | | |
|------------------------|---------------------|-------------|
| Air Permeability: | (cfm) | 500 |
| Grammage: | (g/m ²) | 1115 |
| Thickness: | (mm) | 1,85 |
| Spacing: | (m-1) | 187 |
| Ø Monofilament Spiral: | PET | 0,43 x 0,70 |
| Ø Monofilament Pintle: | PET | 0,70 |
| Size of filler: | PET / P40.1 | 2,65 x 0,65 |

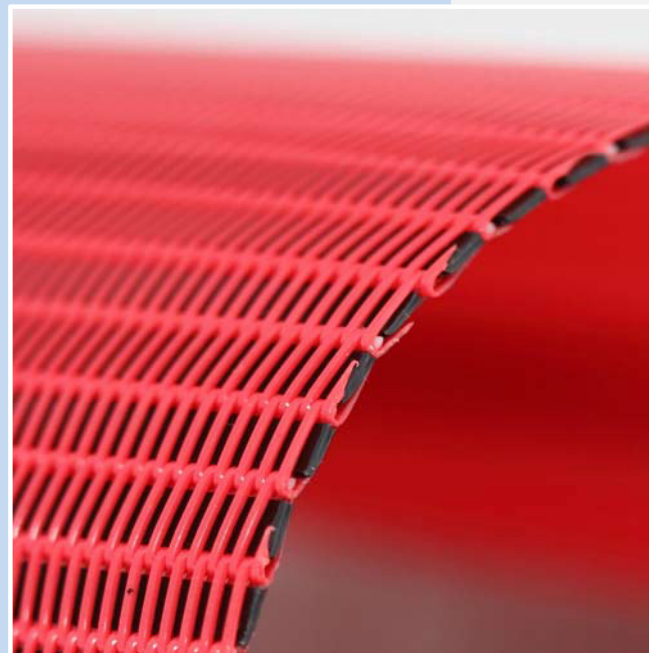

Characteristics & Application:

- Optimized contact area and high drying capacity
- Low thickness
- Hydrolysis stabilized
- Dryer fabric LWC, SC, News paper
- High speed positions PMC
- Board with sensitive surface for markings

Spiralsolution 43500 FSL

Data sheet (heat set fabric)

