



# Spiralsolution 43000 FHL

Data sheet (heat set fabric)

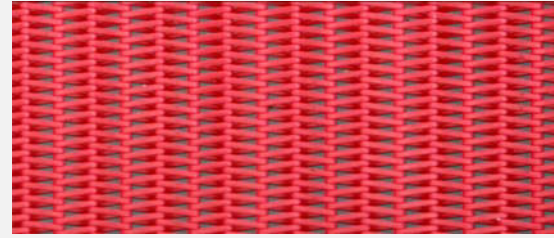

### Technical Data

|                        |                     |             |
|------------------------|---------------------|-------------|
| Air Permeability:      | (cfm)               | 950         |
| Grammage:              | (g/m <sup>2</sup> ) | 795         |
| Thickness:             | (mm)                | 1,85        |
| Spacing:               | (m-1)               | 187         |
| Ø Monofilament Spiral: | PET                 | 0,43 x 0,70 |
| Ø Monofilament Pintle: | PET                 | 0,70        |
| Size of filler:        | xxx                 | xxx         |

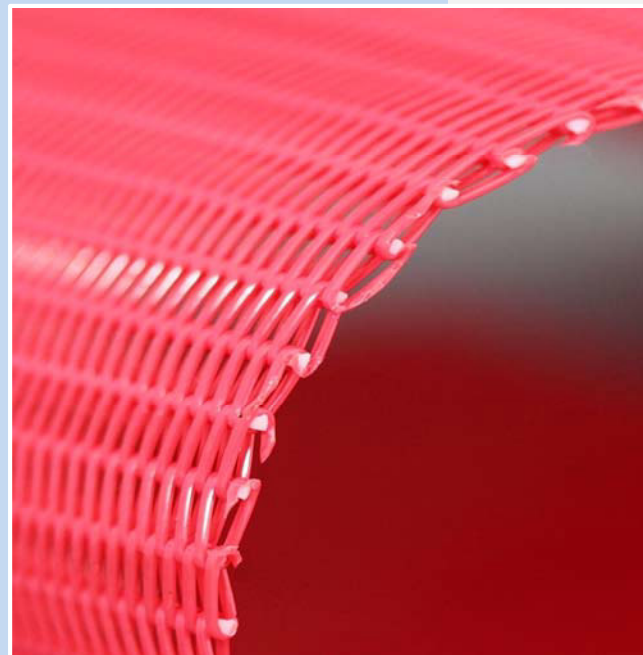

### Characteristics & Application:

- Extrem hydrolysis stability
- Optimized contact area and high drying capacity
- Low thickness
- Dryer fabric LWC, SC, News paper
- Board with sensitive surface for markings
- High speed positions PMC

# Spiralsolution 43000 FHL

Data sheet (heat set fabric)

