


Spiralsolution 70250 S7L A-10


Data sheet (heat set fabric)

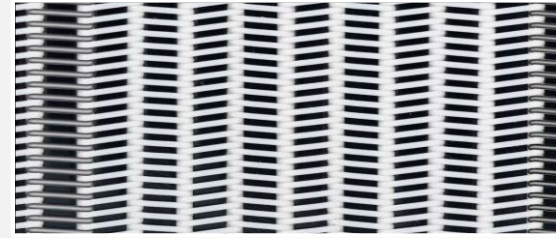

Technical Data

Air Permeability:	(cfm)	250
Grammage:	(g/m ²)	1720
Thickness:	(mm)	2,30
Spacing:	(m-1)	161
Ø Monofilament Spiral:	PET / PET antistatic*	0,70
Ø Monofilament Pintle:	PET	0,70
Size of filler:	PET / P40.1	3,80 x 0,93

* each 10th spiral antistatic monofilament

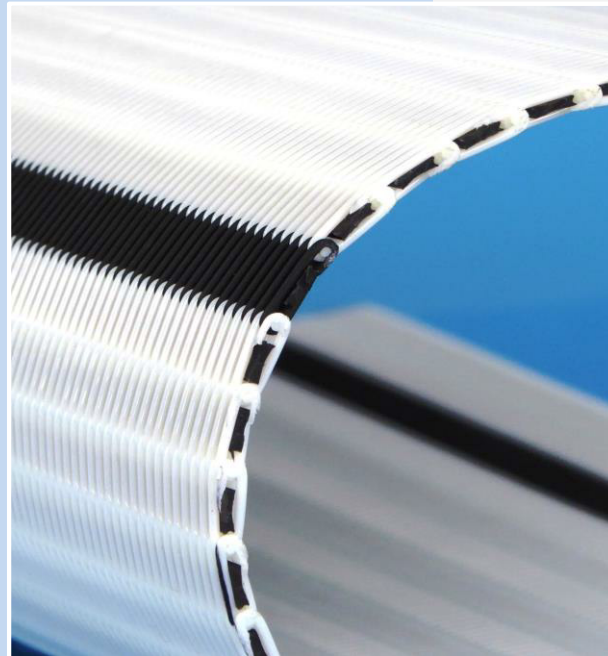


Characteristics & Application:


- Antistatic
- Easy seam closing
- Stabil runnability
- Susceptible positions to electrical discharge
- Board/ Packaging / Pulp Dryer Fabrics

Spiralsolution 70250 S7L A-10


Data sheet (heat set fabric)

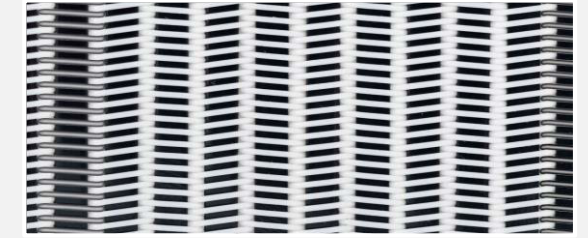

70000 S7L, 70000 H7L, 70000 T7L, 70000 T7L+, 70000 Q7L

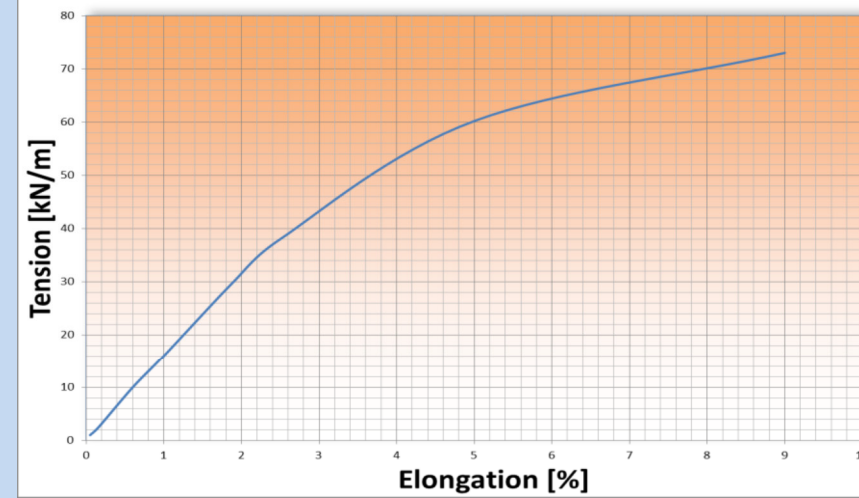

Contact Area

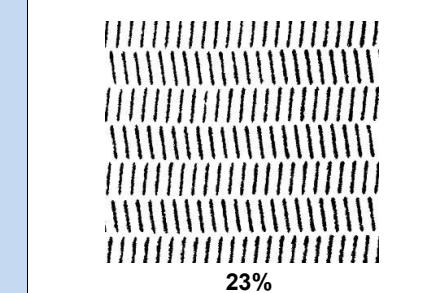

Elongation at specific tension
 70000 S7L, 70000 H7L, 70000 T7L, 70000 T7L+, 70000 Q7L

