


# Spiralsolution 60000 LPPSL


Data sheet (heat set fabric)

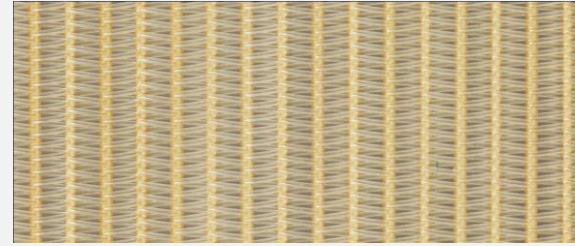

### Technical Data

|                        |                     |      |
|------------------------|---------------------|------|
| Air Permeability:      | (cfm)               | 900  |
| Grammage:              | (g/m <sup>2</sup> ) | 1090 |
| Thickness:             | (mm)                | 2,00 |
| Spacing:               | (m-1)               | 180  |
| Ø Monofilament Spiral: | PPS*                | 0,60 |
| Ø Monofilament Pintle: | PPS*                | 0,70 |
| Size of filler:        | xxx                 | xxx  |

\* food application (EG 1935/2004 + EU 10/2011)

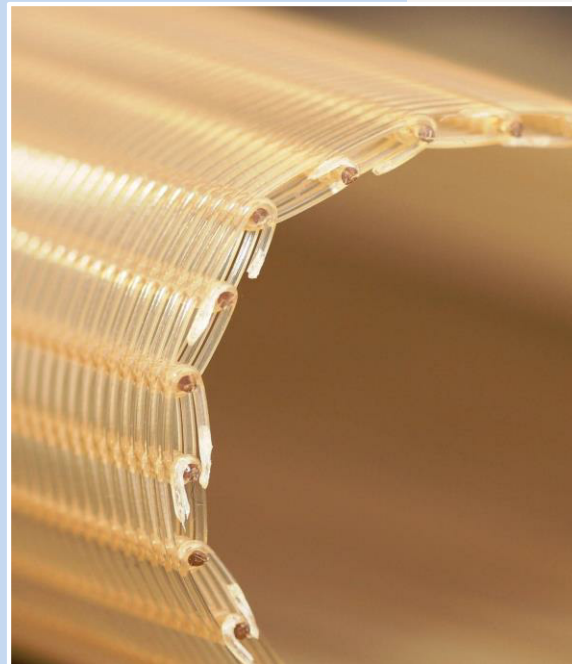

### Characteristics & Application:

- Qualified for food contact
- Longer lifetime under high temperature conditions
- Extrem hydrolysis stability up to 180 °C
- Food industry
- Extrem temperatur positions
- Drying cylinder pressure more than 16 bar (200 °C)

# Spiralsolution 60000 LPPSL

Data sheet (heat set fabric)

