


# Spiralsolution 43150 FHL



Württembergische  
Spiralsiebfabrik GmbH

## Data Sheet (not heat set)

Air permeability ( $\pm 10\%$ ): **150** cfm

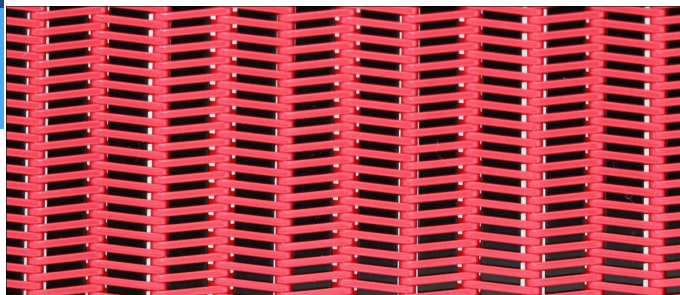

Spiral wire dimensions: **0,43 x 0,70** mm

Pintle wire dimensions: **0,70** mm

Filler wire dimensions: **3,60 x 0,90** mm

Type: **PET**

Type: **PET**

Type: **PET / P40.1**

Spiral: **6,75 x 2,90** mm

Thickness: **2,90** mm

Spiral wire: **755** g/m<sup>2</sup>

Pintle wire: **110** g/m<sup>2</sup>

Filler wire: **590** g/m<sup>2</sup>

Total weight: **1455** g/m<sup>2</sup>

Number of spirals: **196** 1/m

Length of pcs: **31,6** cm

Application: - **Writing and Printing Paper**

- **Board/ Packaging / Pulp Dryer Fabrics**

- **High speed positions PMC**

Characteristics: - **Extrem hydrolysis stability**

- **Stabil runnability**

- **Optimized contact area and high drying capacity**

07.08.2020