


Spiralsolution 43250 FTL



Data Sheet (not heat set)

Air permeability ($\pm 10\%$): **250** cfm

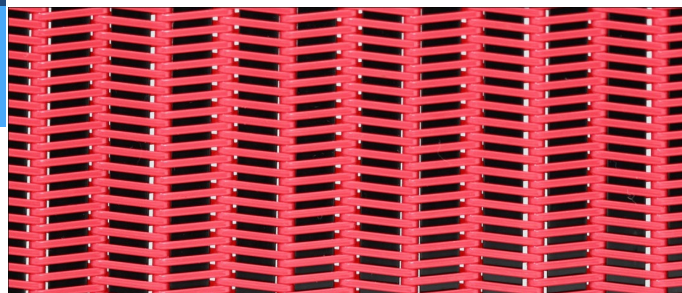

Spiral wire dimensions: **0,43 x 0,70** mm

Pintle wire dimensions: **0,70** mm

Filler wire dimensions: **3,30 x 0,83** mm

Type: **PET - PTFE Blend**

Type: **PET**

Type: **PET / P40.1**

Spiral: **6,75 x 2,90** mm

Thickness: **2,90** mm

Spiral wire: **755** g/m²

Pintle wire: **110** g/m²

Filler wire: **510** g/m²

Total weight: **1375** g/m²

Number of spirals: **196** 1/m

Length of pcs: **31,6** cm

Application: - **Writing and Printing Paper**

- **Board/ Packaging / Pulp Dryer Fabrics**

- **High speed positions PMC**

Characteristics: - **Low contamination**

- **Easy to clean**

- **Optimized contact area and high drying capacity**

07.08.2020