


Spiralsolution 60000 LPPS9

Data Sheet

Air permeability ($\pm 10\%$): **900** cfm

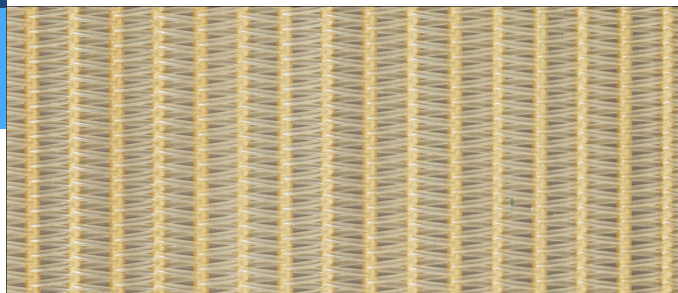

Spiral wire dimensions: **0,60** mm

Pintle wire dimensions: **0,90** mm

Filler wire dimensions: mm

Type: **PPS***

Type: **PPS***

Type:

* Quality proofed according to
EU 10/2011 and FDA
regulations

Spiral: **5,40 x 3,20** mm

Thickness: **3,20** mm

Spiral wire: **1270** g/m²

Pintle wire: **265** g/m²

Filler wire: g/m²

Total weight: **1535** g/m²

Number of spirals: **309** 1/m

Length of pcs: **20,7** cm

Application: - **Food industry**
- **Extrem temperatur positions**
- **Drying cylinder pressure more than 16 bar (200 °C)**

Characteristics: - **Extrem hydrolysis stability up to 180 °C**
- **Longer lifetime under high temperature conditions**
- **Qualified for food contact**

24.10.2012