


# Spiralsolution 60000 LPPS



## Data Sheet (not heat set)

Air permeability ( $\pm 10\%$ ): **900** cfm

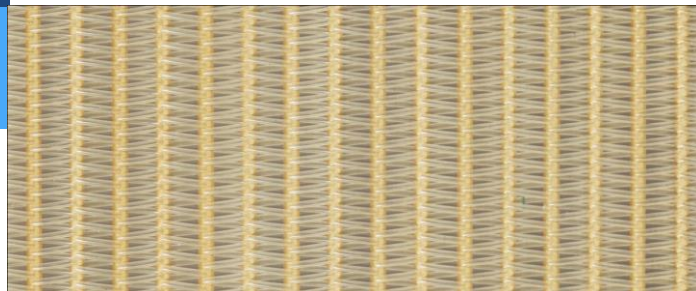

Spiral wire dimensions: **0,60** mm

Pintle wire dimensions: **0,70** mm

Filler wire dimensions:  mm

Type: **PPS\***

Type: **PPS\***

Type:

\* Quality proofed according to EU 10/2011 and FDA regulations

Spiral: **5,40 x 3,20** mm

Thickness: **3,20** mm

Spiral wire: **1195** g/m<sup>2</sup>

Pintle wire: **155** g/m<sup>2</sup>

Filler wire:  g/m<sup>2</sup>

Total weight: **1350** g/m<sup>2</sup>

Number of spirals: **291** 1/m

Length of pcs: **22,0** cm

Application: - **Food industry**  
- **Extrem temperatur positions**  
- **Drying cylinder pressure more than 16 bar (200 °C)**

Characteristics: - **Extrem hydrolysis stability up to 180 °C**  
- **Longer lifetime under high temperature conditions**  
- **Qualified for food contact**

24.10.2012