


Spiralsolution 60000 PPS

Data Sheet (not heat set)



Air permeability ($\pm 10\%$): **900** cfm

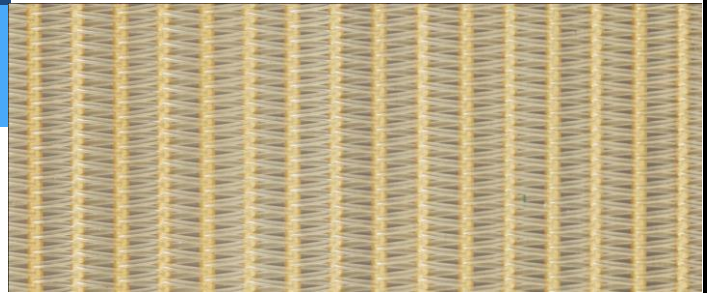

Spiral wire dimensions: **0,60** mm

Pintle wire dimensions: **0,70** mm

Filler wire dimensions: mm

Type: **PPS**

Type: **PPS**

Type:

Spiral: **5,40 x 3,20** mm

Thickness: **3,20** mm

Spiral wire: **1195** g/m²

Pintle wire: **155** g/m²

Filler wire: g/m²

Total weight: **1350** g/m²

Number of spirals: **291** 1/m

Length of pcs: **22,0** cm

- Application:
- **Extrem temperatur positions**
 - **Drying cylinder pressure more than 16 bar (200 °C)**
 - **Tunnel dryer nonwoven, pellets, paint dryer**

- Characteristics:
- **Extrem hydrolysis stability up to 180 °C**
 - **Stabil runnability**
 - **Longer lifetime under high temperature conditions**

24.10.2012