


Spiralsolution 70000 PPS



Data Sheet

Air permeability ($\pm 10\%$): **1000** cfm

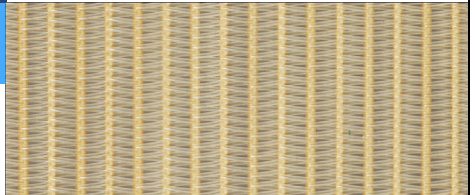

Spiral wire dimensions: **0,70** mm

Pintle wire dimensions: **0,90** mm

Filler wire dimensions: mm

Type: **PPS**

Type: **PPS**

Type:

Spiral: **6,80 x 3,80** mm

Thickness: **3,60** mm

Spiral wire: **1300** g/m²

Pintle wire: **195** g/m²

Filler wire: **0** g/m²

Total weight: **1495** g/m²

Number of spirals: **227** 1/m

Length of pcs: **27** cm

Application: - **Extrem temperatur positions**

- **Drying cylinder pressure more than 16 bar (200 °C)**

- **Tunnel dryer nonwoven, pellets, paint dryer**

Characteristics: - **Extrem hydrolysis stability up to 180 °C**

- **Stabil runnability**

- **Longer lifetime under high temperature conditions**

29.03.2019