


Spiralsolution 60250 TL



Württembergische
Spiralsiebfabrik GmbH

Data Sheet (not heat set)

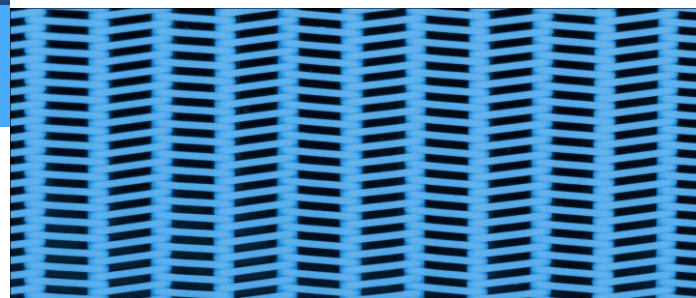

Air permeability ($\pm 10\%$): **250** cfm



Spiral wire dimensions: **0,60** mm

Pintle wire dimensions: **0,70** mm

Filler wire dimensions: **2,90 x 0,74** mm

Type: **PET-PTFE Blend**

Type: **PET**

Type: **PET / P40.1**

Spiral: **6,80 x 3,25** mm

Thickness: **3,25** mm

Spiral wire: **1015** g/m²

Pintle wire: **115** g/m²

Filler wire: **435** g/m²

Total weight: **1565** g/m²

Number of spirals: **211** 1/m

Length of pcs: **29,4** cm

Application: - **Slurry dewatering**

- **Conveyor belt**

- **Drying tunnel**

Characteristics: - **Low contamination**

- **Easy to clean**

- **Easy closing of the seam**

14.01.2016