


# Spiralsolution 70250 T7L



Württembergische  
Spiralsiebfabrik GmbH

## Data Sheet (not heat set)

Air permeability ( $\pm 10\%$ ): **250** cfm

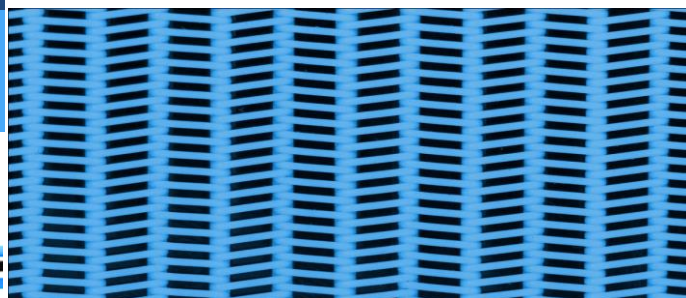

Spiral wire dimensions: **0,70** mm

Pintle wire dimensions: **0,70** mm

Filler wire dimensions: **3,80 x 0,95** mm

Type: **PET-PETFE Blend**

Type: **PET**

Type: **PET / P40.1**

Spiral: **8,40 x 3,40** mm

Thickness: **3,40** mm

Spiral wire: **1090** g/m<sup>2</sup>

Pintle wire: **90** g/m<sup>2</sup>

Filler wire: **540** g/m<sup>2</sup>

Total weight: **1720** g/m<sup>2</sup>

Number of spirals: **165** 1/m

Length of pcs: **30,3** cm

Application: - **Slurry dewatering**

- **Conveyor belt**

- **Dryer fabric**

Characteristics: - **Low contamination**

- **Easy to clean**

- **Stabil runnability**

14.01.2016