



# Spiralsolution 43000 FSL

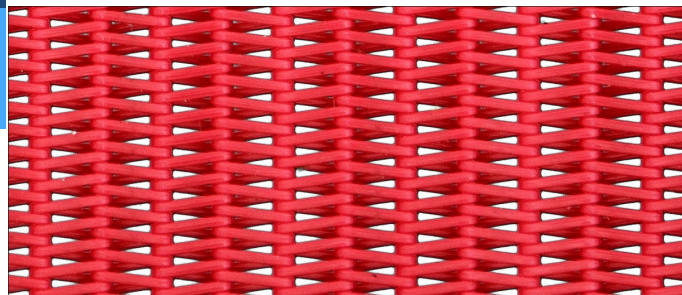

## Data Sheet (not heat set)

Air permeability ( $\pm 10\%$ ): **950** cfm



Spiral wire dimensions: **0,43 x 0,70** mm  
Pintle wire dimensions: **0,70** mm  
Filler wire dimensions:  mm

Type: **PET**  
Type: **PET**  
Type:

Spiral: **6,75 x 2,90** mm

Thickness: **2,90** mm

Spiral wire: **755** g/m<sup>2</sup>  
Pintle wire: **110** g/m<sup>2</sup>  
Filler wire:  g/m<sup>2</sup>  
Total weight: **815** g/m<sup>2</sup>

Number of spirals: **196** 1/m  
Length of pcs: **31,6** cm

Application: - **Writing and Printing Paper**  
- **Packaging paper**  
- **Dryer fabric**

Characteristics: - **High drying capacity**  
- **High hydrolysis stability**  
- **Stabil runnability**