
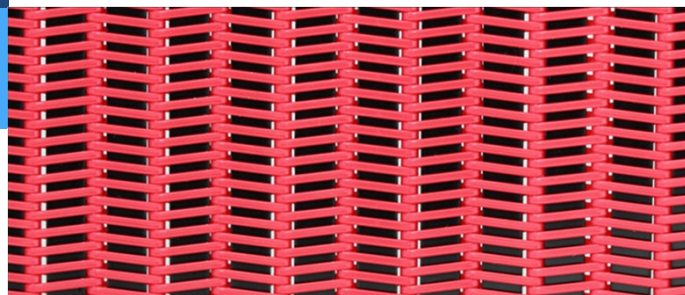


# Spiralsolution 43150 FSL

## Data Sheet (not heat set)

Air permeability ( $\pm 10\%$ ): **150** cfm



Spiral wire dimensions: **0,43 x 0,70** mm

Pintle wire dimensions: **0,70** mm

Filler wire dimensions: **3,60 x 0,90** mm

Type: **PET**

Type: **PET**

Type: **PET / P40.1**

Spiral: **6,75 x 2,90** mm

Thickness: **2,90** mm

Spiral wire: **755** g/m<sup>2</sup>

Pintle wire: **110** g/m<sup>2</sup>

Filler wire: **590** g/m<sup>2</sup>

Total weight: **1455** g/m<sup>2</sup>

Number of spirals: **196** 1/m

Length of pcs: **31,6** cm

- Application:
- **Dryer fabric LWC, SC, News paper**
  - **Fast machines / Packaging paper and board**
  - **High speed positions PMC**

- Characteristics:
- **Optimized contact area and high drying capacity**
  - **Low thickness**
  - **Hydrolysis resistant**

07.08.2020