


# Spiralsolution 43200 FSL

## Data Sheet (not heat set)

Air permeability ( $\pm 10\%$ ): **200** cfm

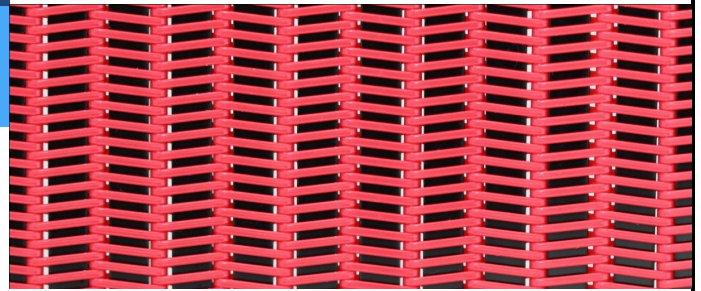

Spiral wire dimensions: **0,43 x 0,70** mm

Type: **PET**

Pintle wire dimensions: **0,70** mm

Type: **PET**

Filler wire dimensions: **3,45 x 0,85** mm

Type: **PET / P40.1**

Spiral: **6,75 x 2,90** mm

Thickness: **2,90** mm

Spiral wire: **755** g/m<sup>2</sup>

Pintle wire: **110** g/m<sup>2</sup>

Filler wire: **550** g/m<sup>2</sup>

Total weight: **1415** g/m<sup>2</sup>

Number of spirals: **196** 1/m

Length of pcs: **31,6** cm

Application: - **Writing and Printing Paper**

- **Packaging paper**

- **Dryer fabric**

Characteristics: - **High drying capacity**

- **High hydrolysis stability**

- **Stabil runnability**